

TECH LIGHTING
EXPERIENCE LED

modeler

TECH LIGHTING
EXPERIENCE LED

Tech Lighting address: rue Johannes Gutenberg 231400 Nivelles-Belgium
TEL: +0032 67.63.88.24 Email: info@techlighting.eu web: www.techlighting.eu

Smart System

MODELER • SMART SYSTEM

DEBUT SHOW

Firmness and gentleness Free your mind with light

Modeler · Smart track lighting system is an exploratory product in terms of layout layer, visual sensory layer, and interactive layer. It breaks through the traditional design of the existing lighting system, breaks the inherent thinking, and innovatively uses the combination of "softness" and "hardness" to provide a power supply platform for the lighting module. Through the 0.65cm ultra-thin hard track and the silicone flexible track design, it is "hard" and "soft" connected, Firmness and gentleness, free your mind with light.

According to the multi-dimensional needs of today's users, Modeler Modules develops a variety of functional products in depth. The products are modularized. Different modules can be installed and matched at will, which can provide accent lighting and basic lighting for different places. Also they can be used as atmosphere lighting to achieve the decoration and artistry required by the space. The Modeler module takes into account the needs of various occasions with professional optical design, and controls glare while meeting the illumination requirements, providing users with a healthy and comfortable lighting environment. The smart platform has 4 wires inside the track, which can easily cope with the mainstream smart control systems in the market, realize the smart of the whole house, and keep everything under control. The combination of ultra-thin hard track and silicone soft track will present different visual impact effects under the creation of different designers.

Modeler is a combination of smart, optics and aesthetics. On the premise of realizing multi-function, it realizes the smart solution of the whole house, and it is also decorative, achieving the perfect fusion of practicality and aesthetics. Flexibility: The application of soft track solves the problem of traditional tracks being limited by structure and angle. Soft tracks are less limited by space, giving greater freedom in design and realizing more diverse lighting design solutions. Fashionable: soft track, customized fabric style, multiple choices of surface treatment, customized colors, in line with the aesthetics of young people nowadays, and can realize more personalized and fashionable designs. The integration of interesting design and aesthetic design improves the user's sensory experience, thereby increasing user participation.

Contents


MODELER - Flex series

P007-028



MODELER - Arris series

P029-046

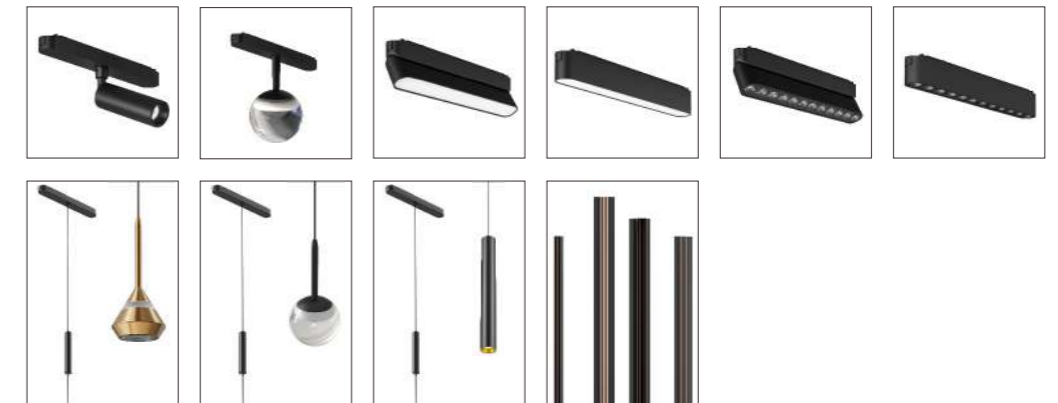

MODELER - Softlink series

P047-064



MODELER• SMART SYSTEM

DEBUT SHOW

- last for 2 yrs
- 2 invention patents
- 8 utility model patents
- 18 appearances patent
- Support all kinds of controlling systems like 0-10V, Dali,
- Zigbee, Bluetooth mesh etc.




Firmness and gentleness Free your mind with light

Arris

Flex

Softlink

Modeler
Intelligent Lighting System

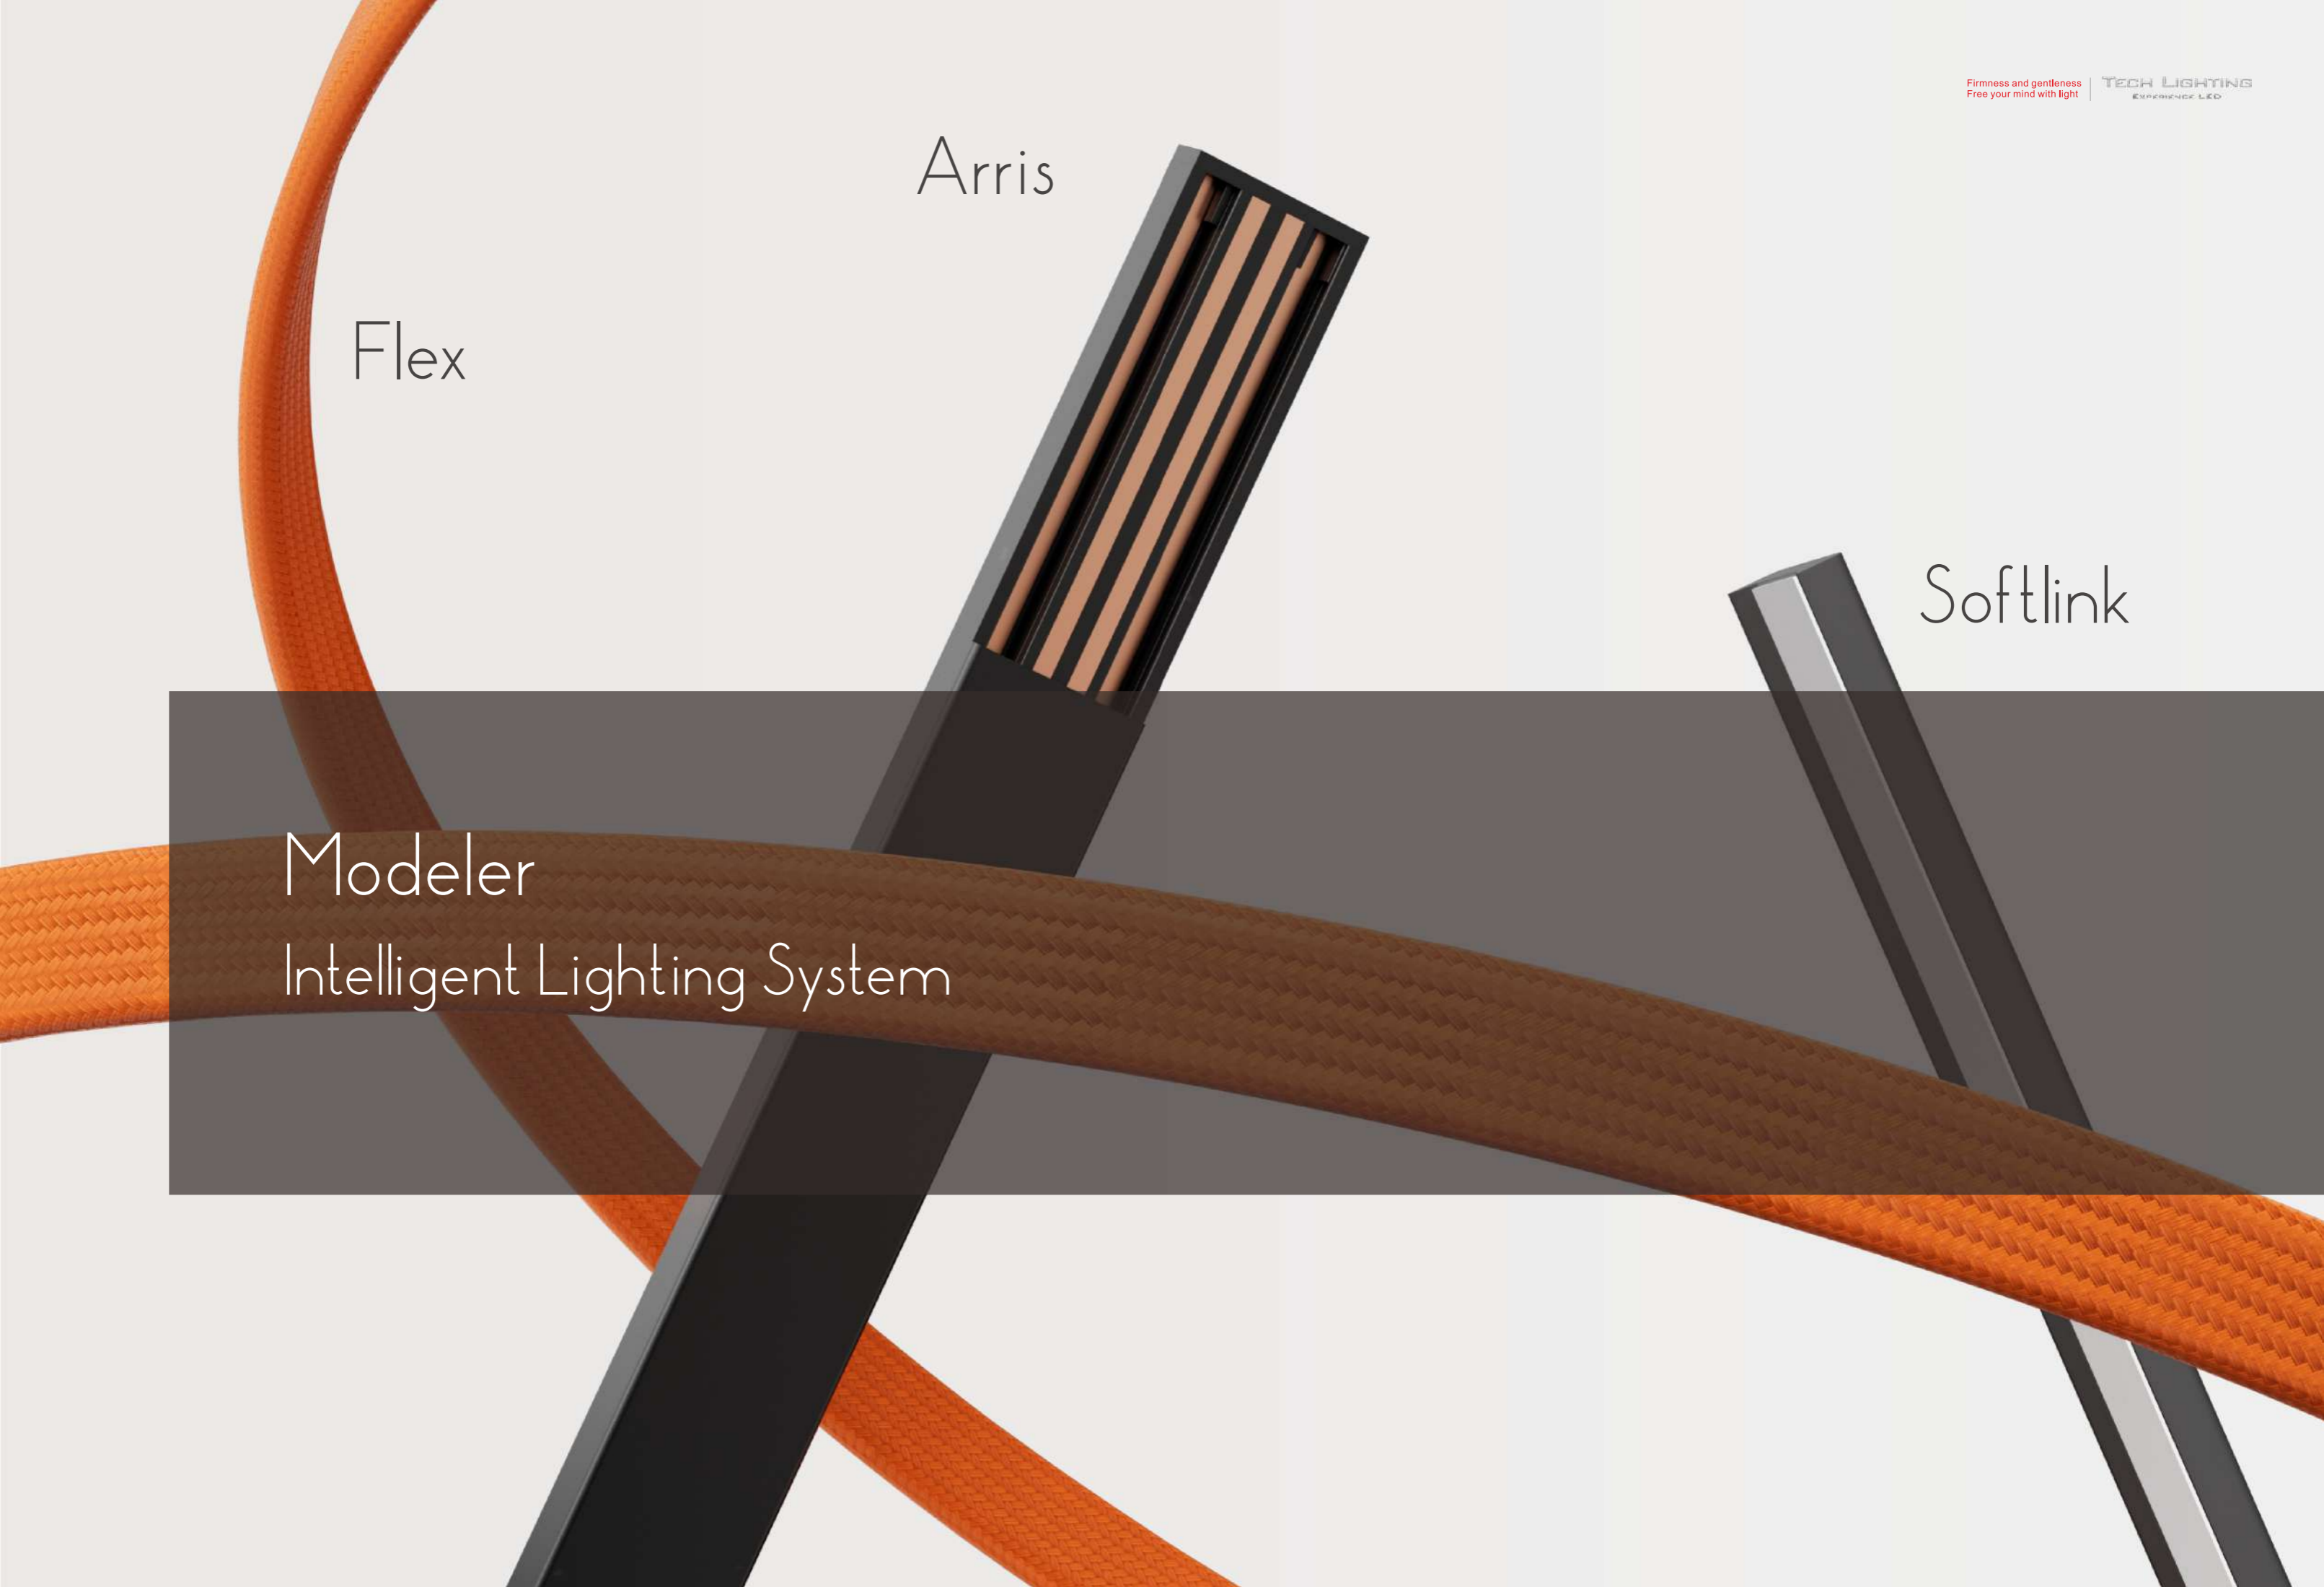

Modules

The combination of firmness and gentleness which stands for this lighting system. It allows for free placement of the luminaires to create unique light solutions.



Spot Module



Flood Module



Track Module



Pendant Module




阿拉丁 ALIGHTING
神灯奖 AWARD

The Best Product of The 11th Alighting Award

Flex

Firmness and gentleness
Free your mind with light

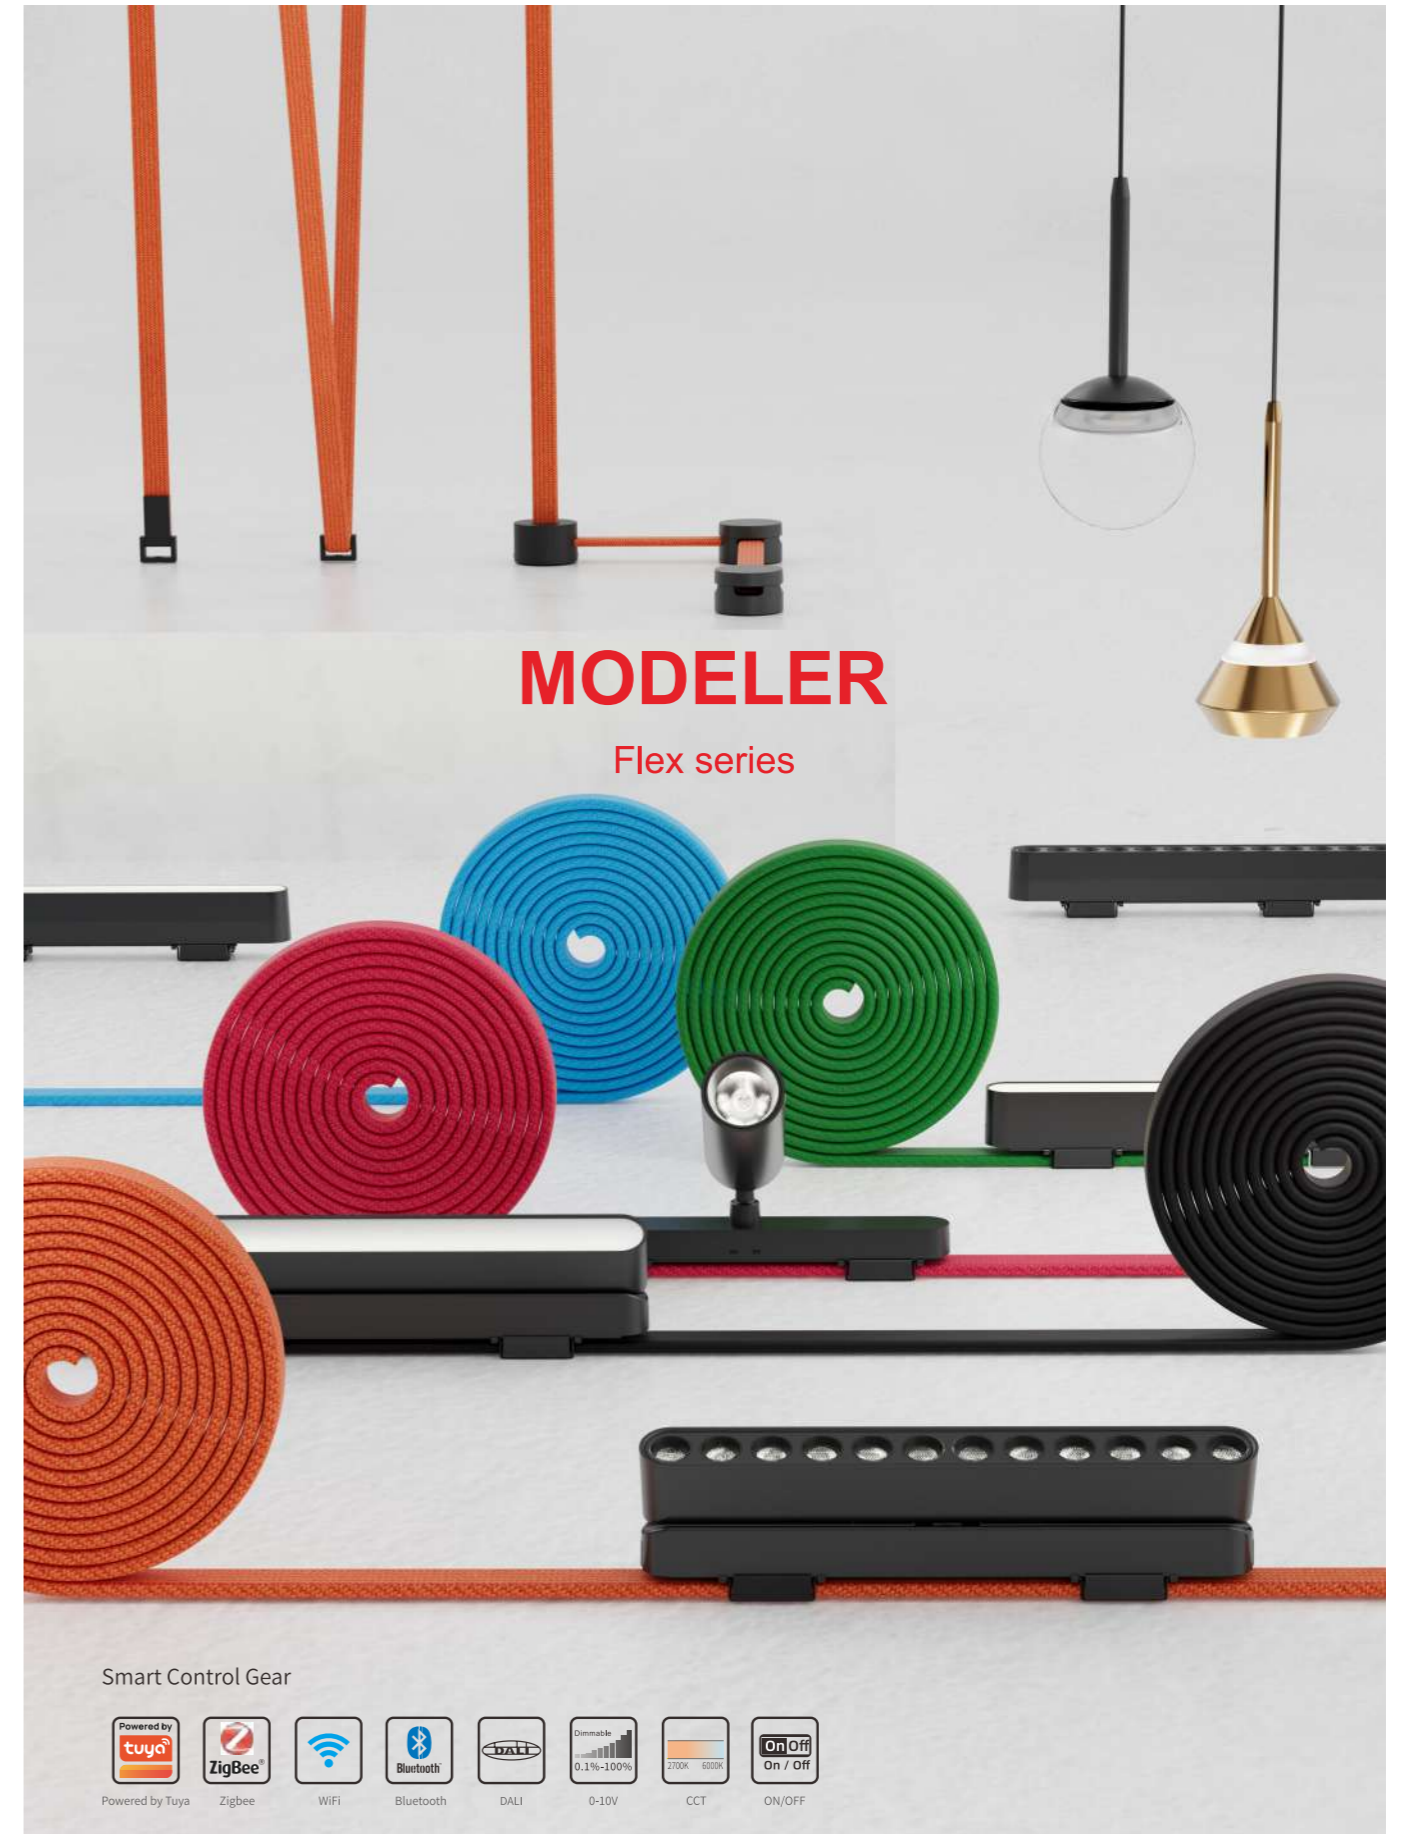

MODELER

Flex series

Smart Control Gear




Flex

Optional Colours

- Pink
- Hermes Orange
- Red
- Blue
- Green
- Black


- Maximum 20 meters length per electrical connection point.
- Dali compatible with 4wires.

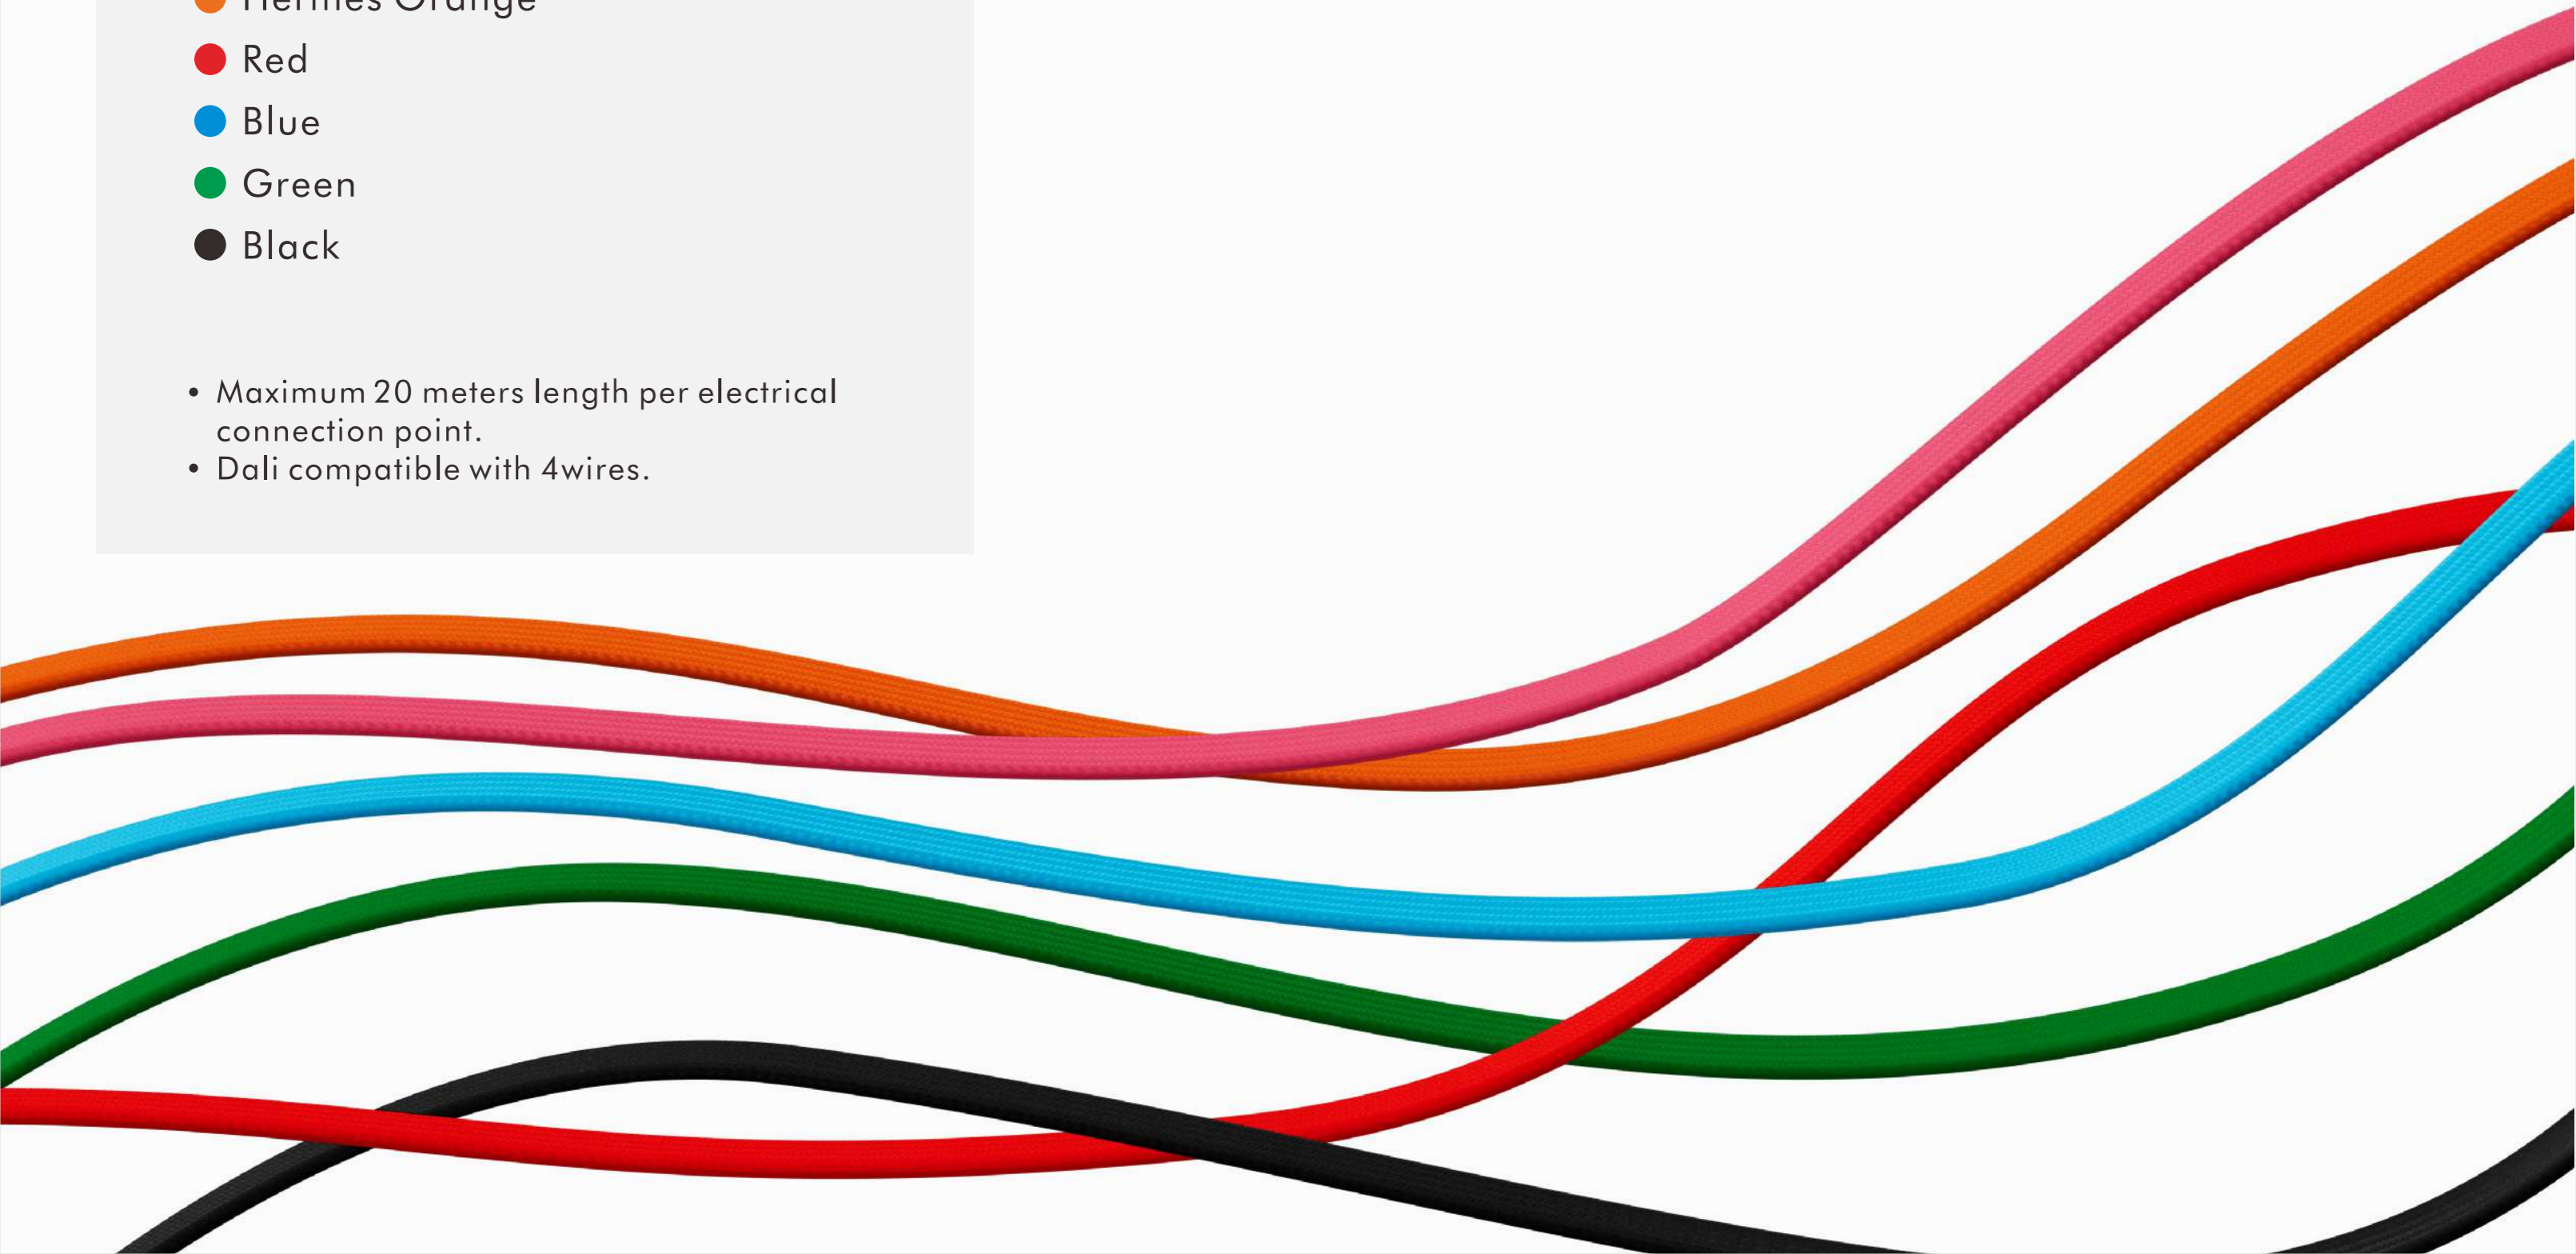


Flex

Floating Pendants

Modeler Flex modules provide various styles for illuminating a space. Suspended overhead in soft or taut, their graphic presence creates distinctive ambiances.

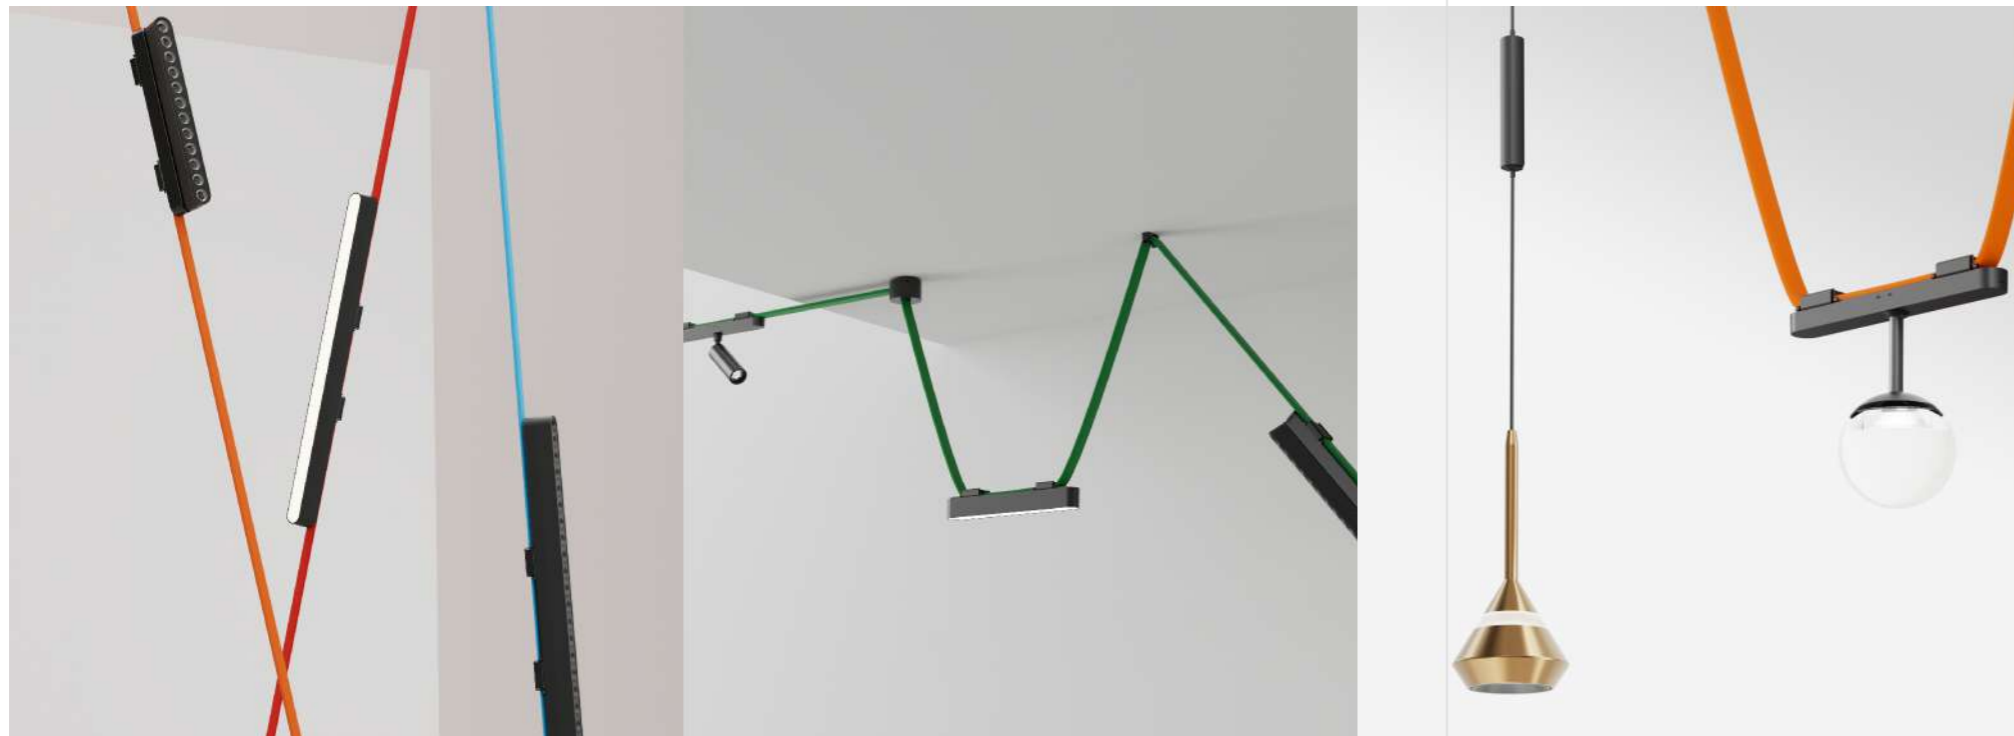

R-22T81105



CITIZEN

W B GL

General Informarion


Optics	15° / 24° / 38°
System Power (Watt)	5W / 10W / 18W
Lumen(lm)	69 lm/W, 78 lm/W, 89 lm/W,
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L198xΦ30xH127mm R-22T81105 (5W)
L198xΦ38xH146mm R-22T81112 (10W)
L198xΦ53xH172mm R-22T81120 (18W)

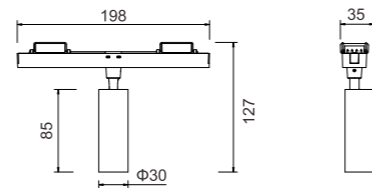

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:

- Hermes Orange
- Green
- White
- Red
- Black
- Customizable



For more product details, please consult the sales team.

R-22D82205



CITIZEN

W B GL


General Informarion

Optics	30°
System Power (Watt)	4W
Lumen(lm)	83 lm/w
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

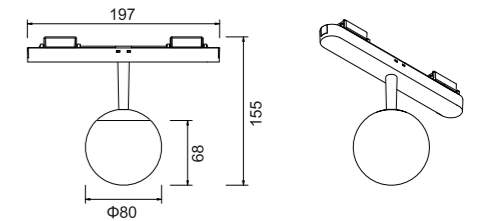

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:


- Hermes Orange
- Green
- White
- Red
- Black
- Customizable




For more product details, please consult the sales team.

Photometric

4W 30° 3000K

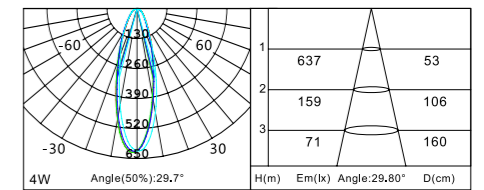

R-22A80112



CITIZEN

W B GL

General Informarion



Optics	110°
System Power (Watt)	12W
Lumen(lm)	80 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Dimensions (mm)

L237xW29xH55mm (12W)

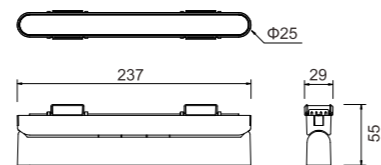

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:

- Hermes Orange
- Green
- White
- Red
- Black
- Customizable



For more product details, please consult the sales team.

R-22D80012



CITIZEN

W B GL

General Informarion


Optics	110°
System Power (Watt)	12W
Lumen(lm)	80 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Dimensions (mm)

L237xW29xH41mm R-22D80012 (12W)
 L472xW27.5xH45mm R-22D80024ET (18W)
 L705xW27.5xH45mm R-22D80036ET (22W)
 L937xW27.5xH45mm R-22D80048ET (26W)
 L1170xW27.5xH45mm R-22D80060ET (26W/30W)

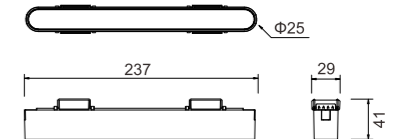

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60




Cord colours:

- Hermes Orange
- Green
- White
- Red
- Black
- Customizable



Photometric

12W 110° 4000K

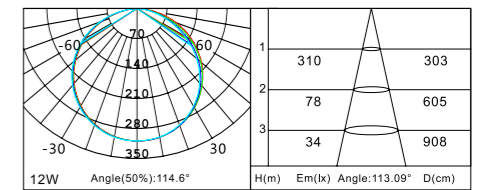

R-22A80312



CITIZEN

W B GL

General Informarion



Optics	36°
System Power (Watt)	12W
Lumen(lm)	100 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Dimensions (mm)

L237xW29xH55mm (12W)

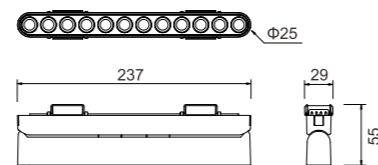

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:

Hermes Orange Green White
 Red Black Customizable



For more product details, please consult the sales team.

R-22D80612



CITIZEN

W B GL

General Informarion


Optics	36°
System Power (Watt)	12W
Lumen(lm)	100 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Dimensions (mm)

L237xW29xH41mm R-22D80612 (12W)
 L472xW27.5xH45mm R-22D80624ET (18W)
 L705xW27.5xH45mm R-22D80636ET (22W)
 L937xW27.5xH45mm R-22D80648ET (26W)
 L1170xW27.5xH45mm R-22D80660ET (26W/30W)

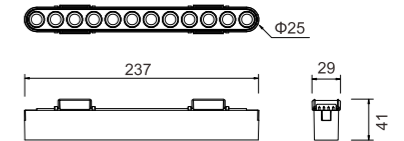

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:


Hermes Orange Green White
 Red Black Customizable



For more product details, please consult the sales team.

Photometric

12W 36° 4000K

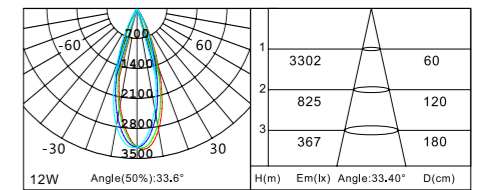

R-22P82507



CITIZEN

W B GL




General Informarion

Optics	15° / 24° / 36°
System Power (Watt)	7W
Lumen(lm)	26 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD+COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

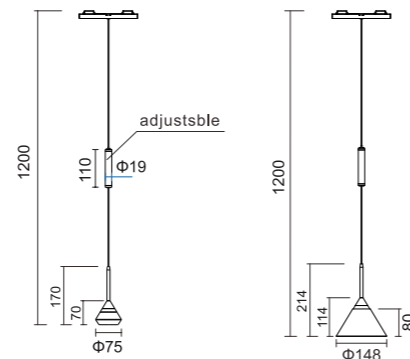

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60 Optical
可选配件



Cord colours:

● Hermes Orange ● Green ○ White
● Red ● Black ● Customizable



For more product details, please consult the sales team.

R-22P82205



CITIZEN

W B GL




General Informarion

Optics	30°
System Power (Watt)	4W
Lumen(lm)	83 lm/w
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

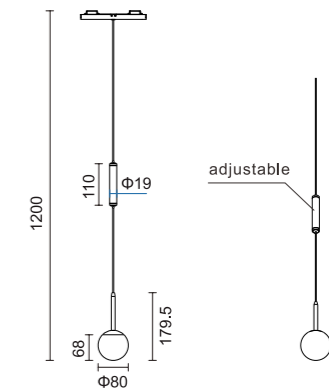

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:


● Hermes Orange ● Green ○ White
● Red ● Black ● Customizable



For more product details, please consult the sales team.


Photometric

7W 36° 3000K

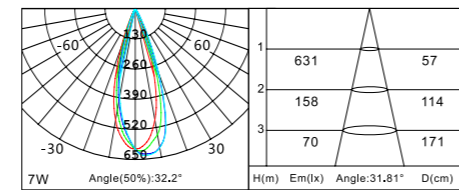

Photometric

4W 30° 3000K

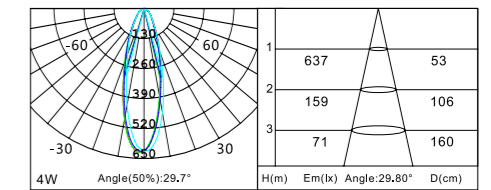

R-22D82206-12



CITIZEN

W B GL

渲染效果图, 产品图案以实物为准。
Rendering effect, product pattern in kind shall prevail.




General Informarion

Optics	120°
System Power (Watt)	5W
Lumen(lm)	---
Driver Parameters	DC48V

Dimensions (mm)

Φ120*146.7mm R-22D82206-12
Φ150*178.5mm R-22D82206-15
Φ200*230.7mm R-22D82206-20

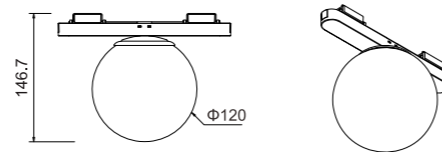

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:

● Hermes Orange ● Green ○ White
● Red ● Black ⊕ Customizable

Actual Photo



Actual Photo

R-22P82206-12



CITIZEN

W B GL

渲染效果图, 产品图案以实物为准。
Rendering effect, product pattern in kind shall prevail.




General Informarion

Optics	120°
System Power (Watt)	5W
Lumen(lm)	---
Driver Parameters	DC48V

Dimensions (mm)

Φ120*136.9mm R-22P82206-12
Φ150*168.7mm R-22P82206-15
Φ200*200.8mm R-22P82206-20

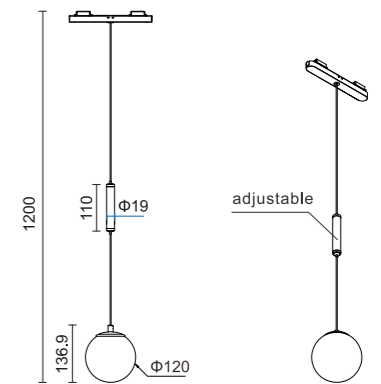

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60



Cord colours:

● Hermes Orange ● Green ○ White
● Red ● Black ⊕ Customizable

Actual Photo



Actual Photo




For more product details, please consult the sales team.



MODELER

Flex series

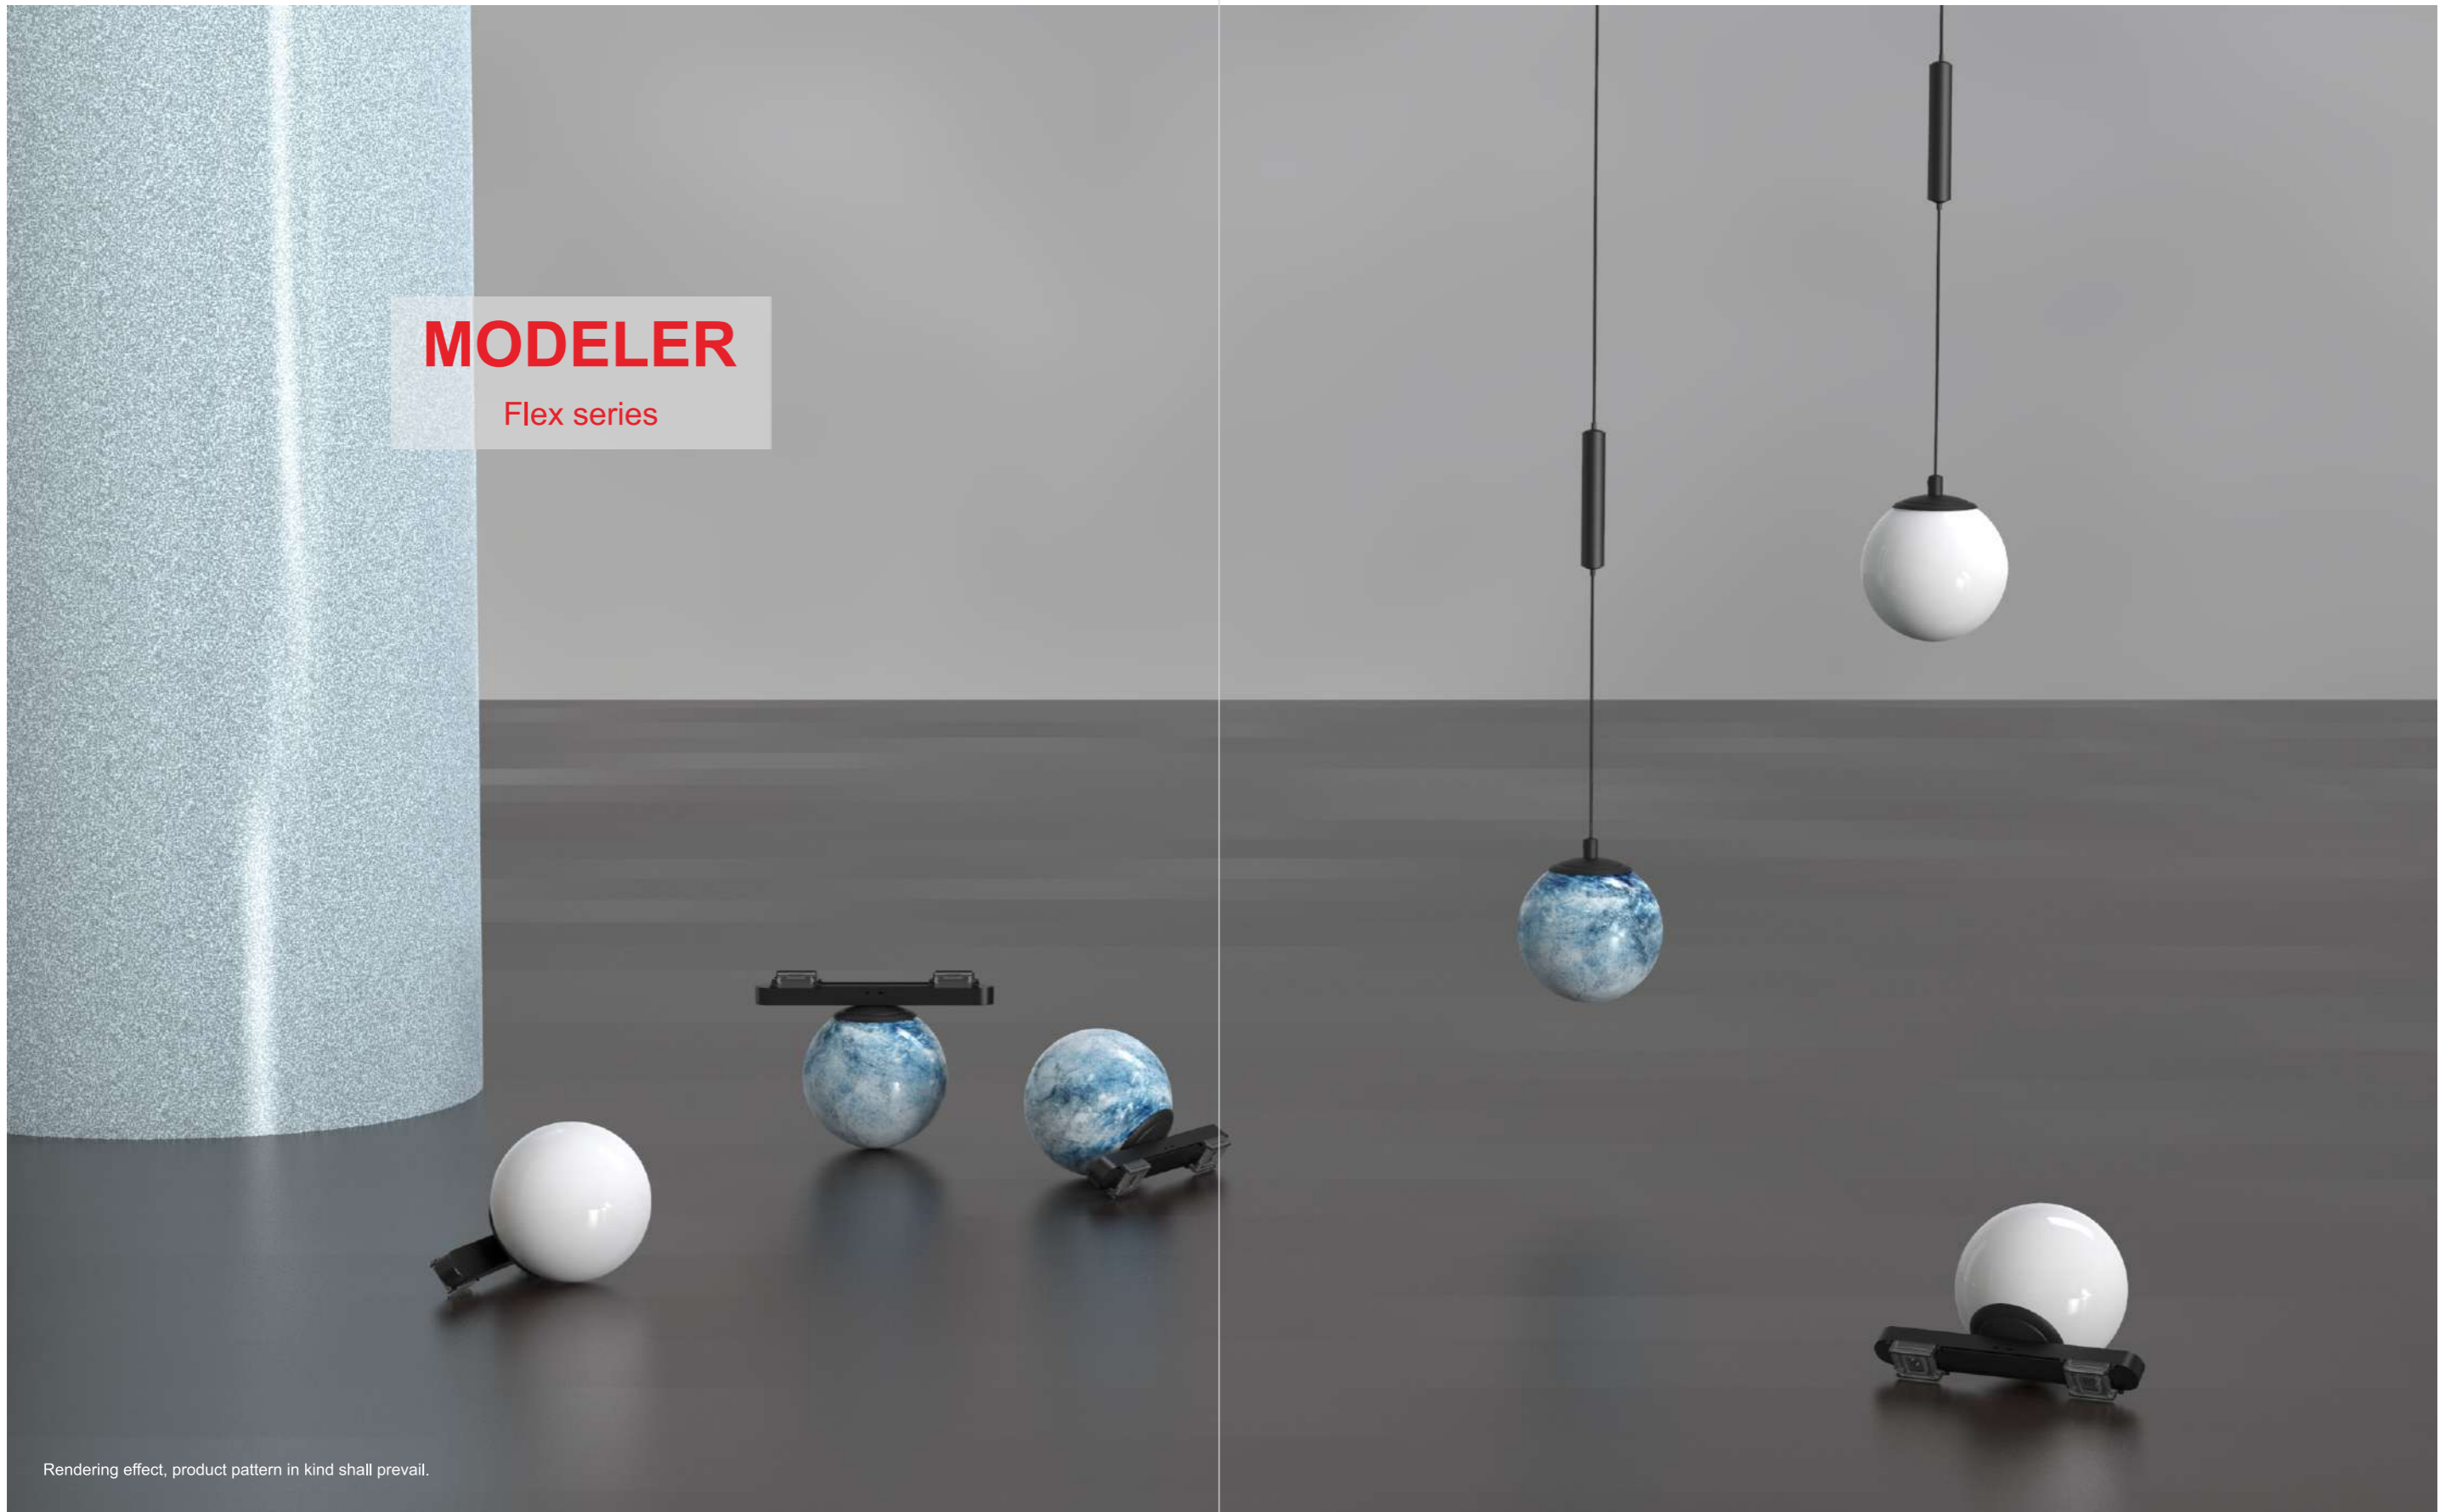

Rendering effect, product pattern in kind shall prevail.

R-22P82107



CITIZEN

W B GL




General Informarion

Optics	15° / 24° / 36°
System Power (Watt)	7W
Lumen(lm)	58 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Dimensions (mm)

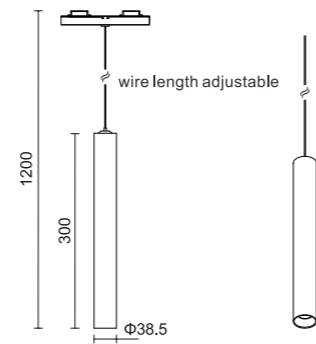

Accessories



R-22P2006IM R-22P2006-90 R-22P2006-180 R-22P2006-90L R-22P2006PE

Optional colours: W B GL B+GL



R-22P2006 R-22C-LA198-SN R-21P2007SW-60





Cord colours:

- Hermes Orange
- Green
- White
- Red
- Black
- Customizable


Photometric

7W 36° 4000K

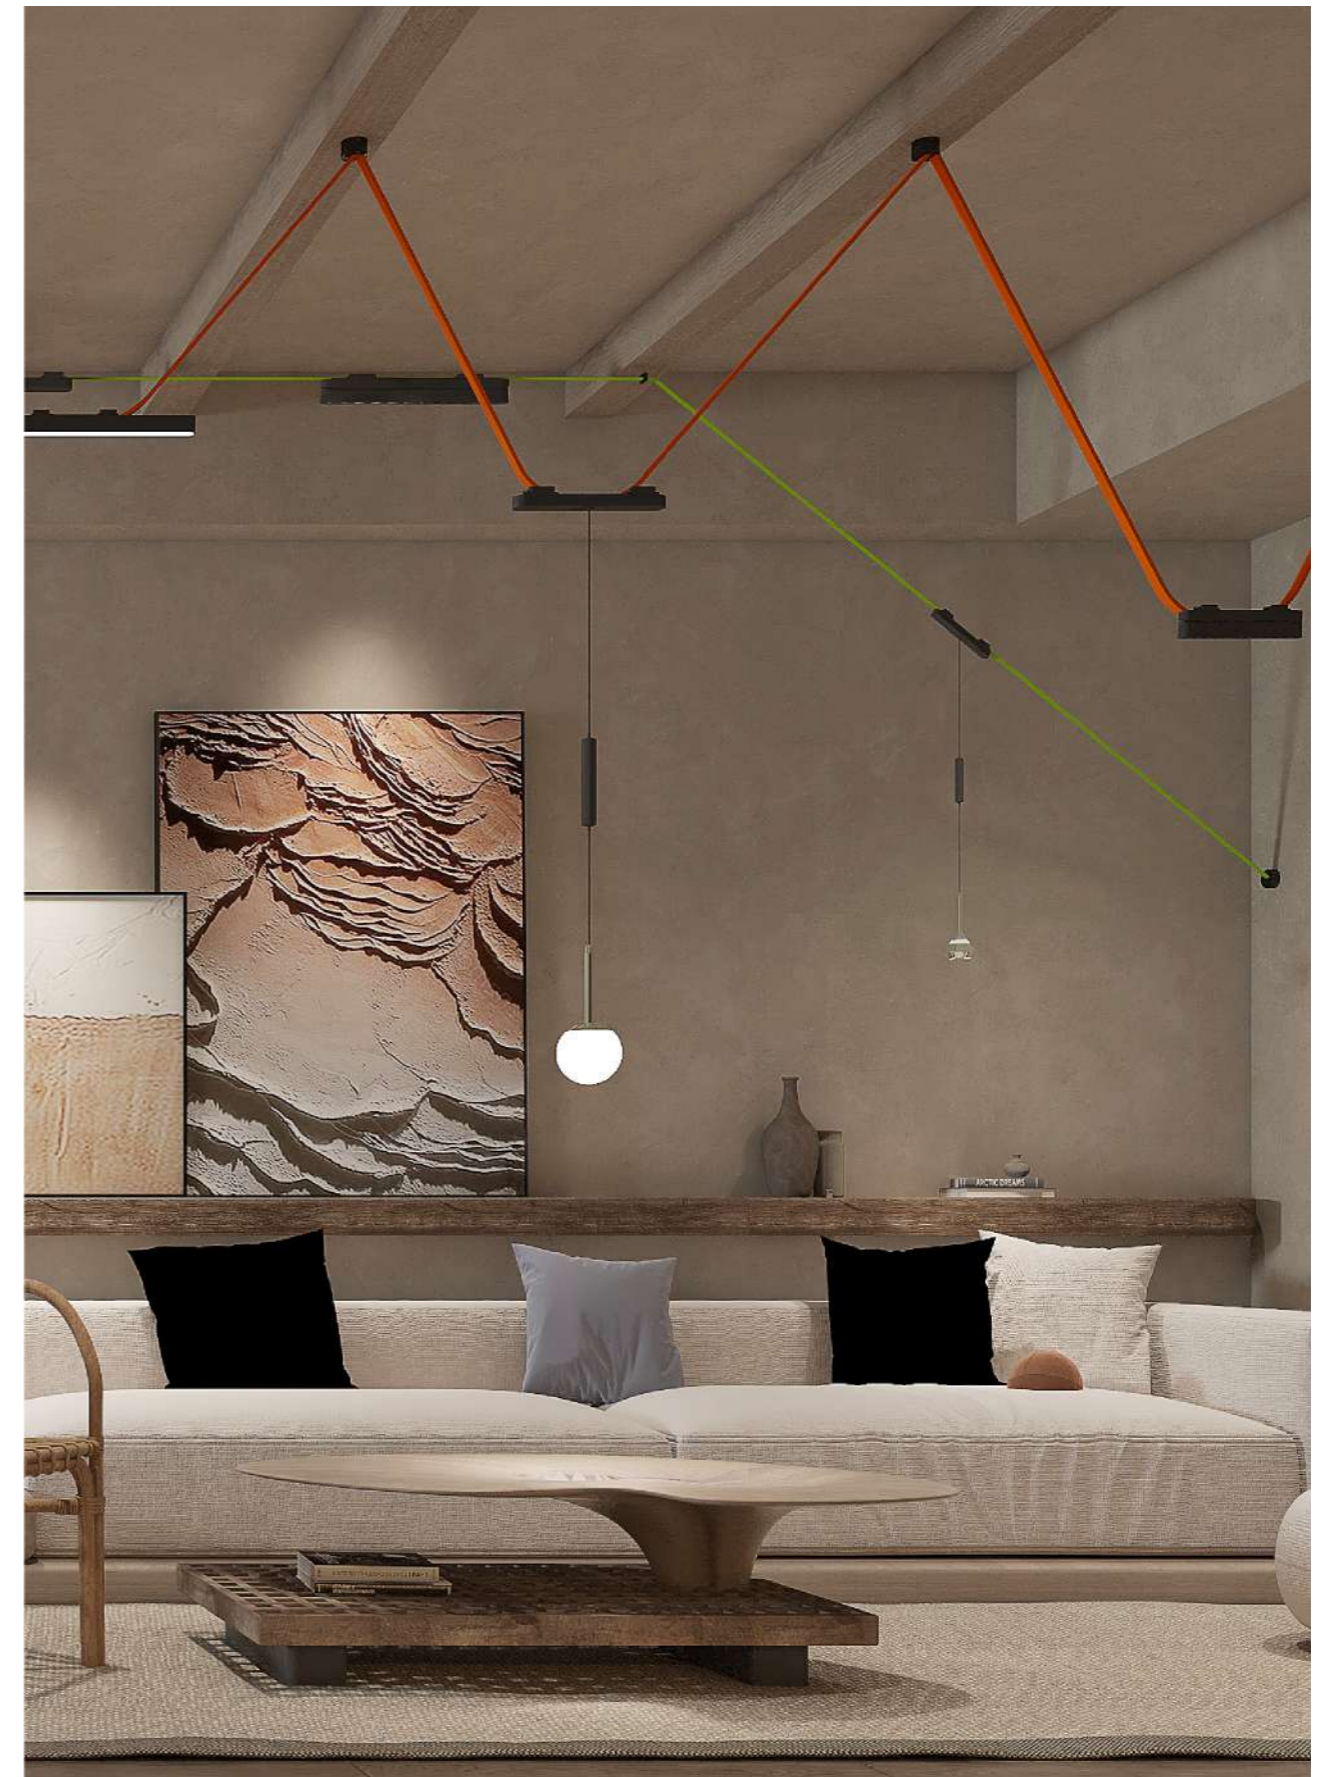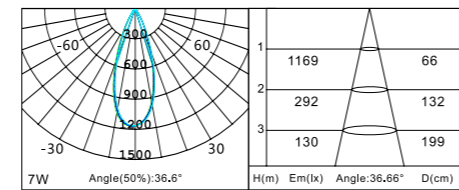

For more product details, please consult the sales team.

Installation

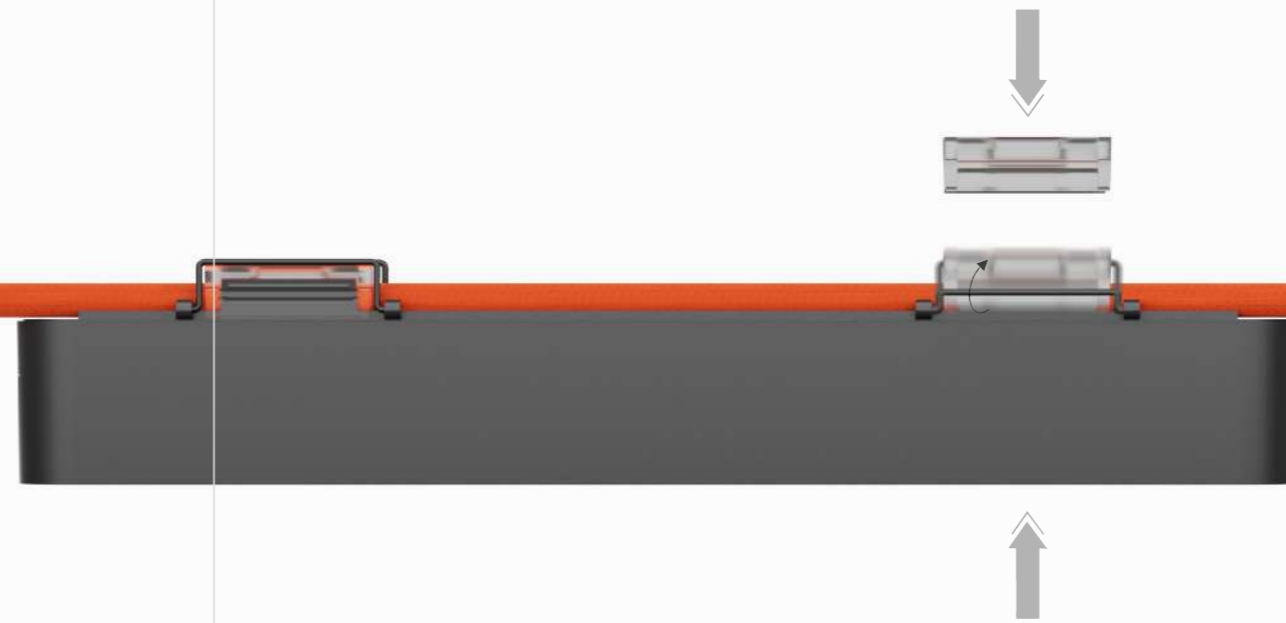

Clip & Play





Fast connection

Each belt accommodates multiple luminaires with simple clip and play function for ease installation and connection. Each belt can be cut as needed and it offers adjustments in tension from taut to relaxed.



Arris

Firmness and gentleness
Free your mind with light

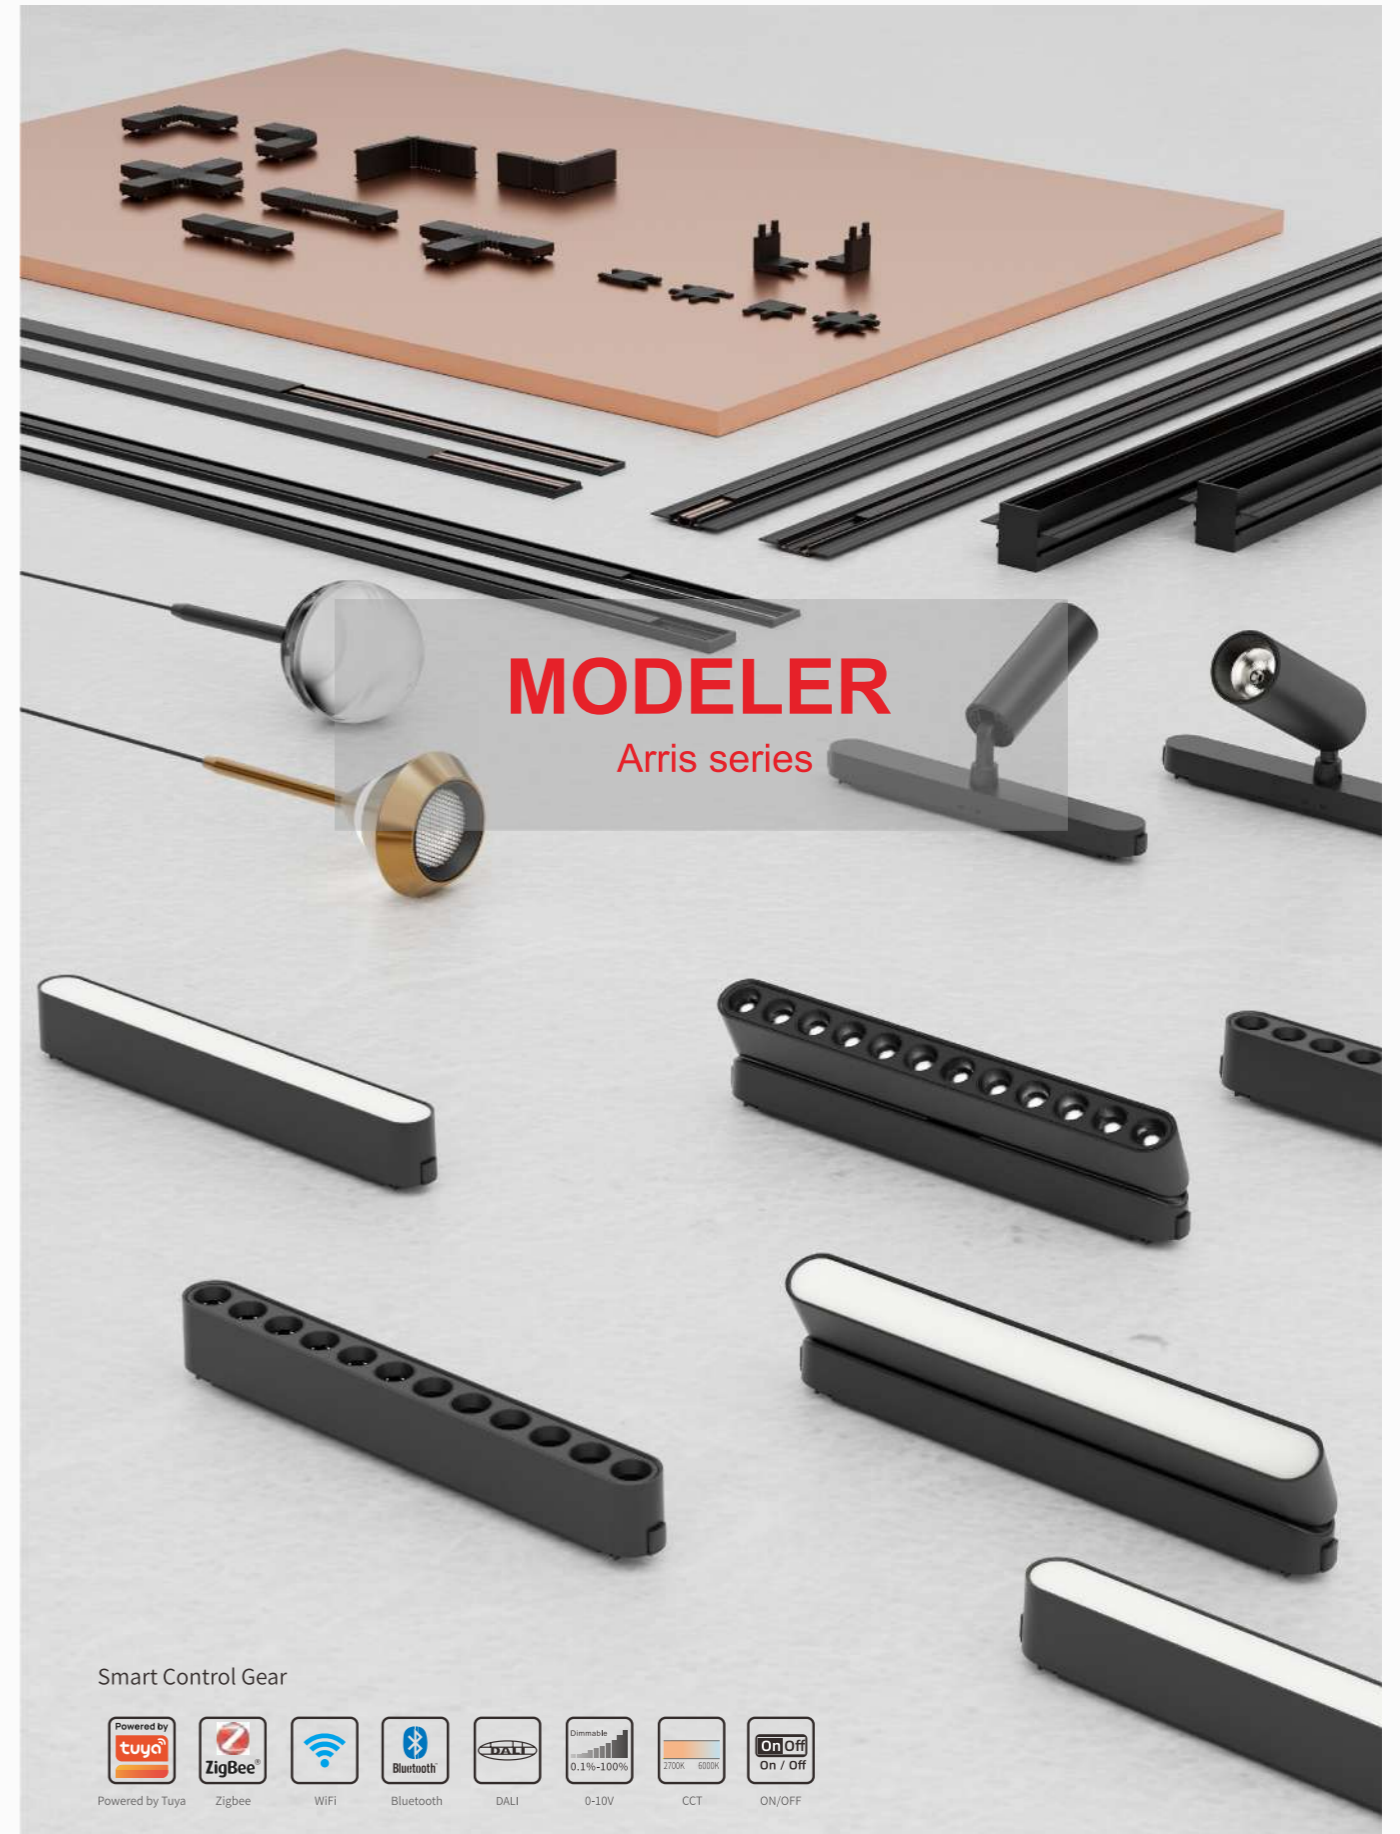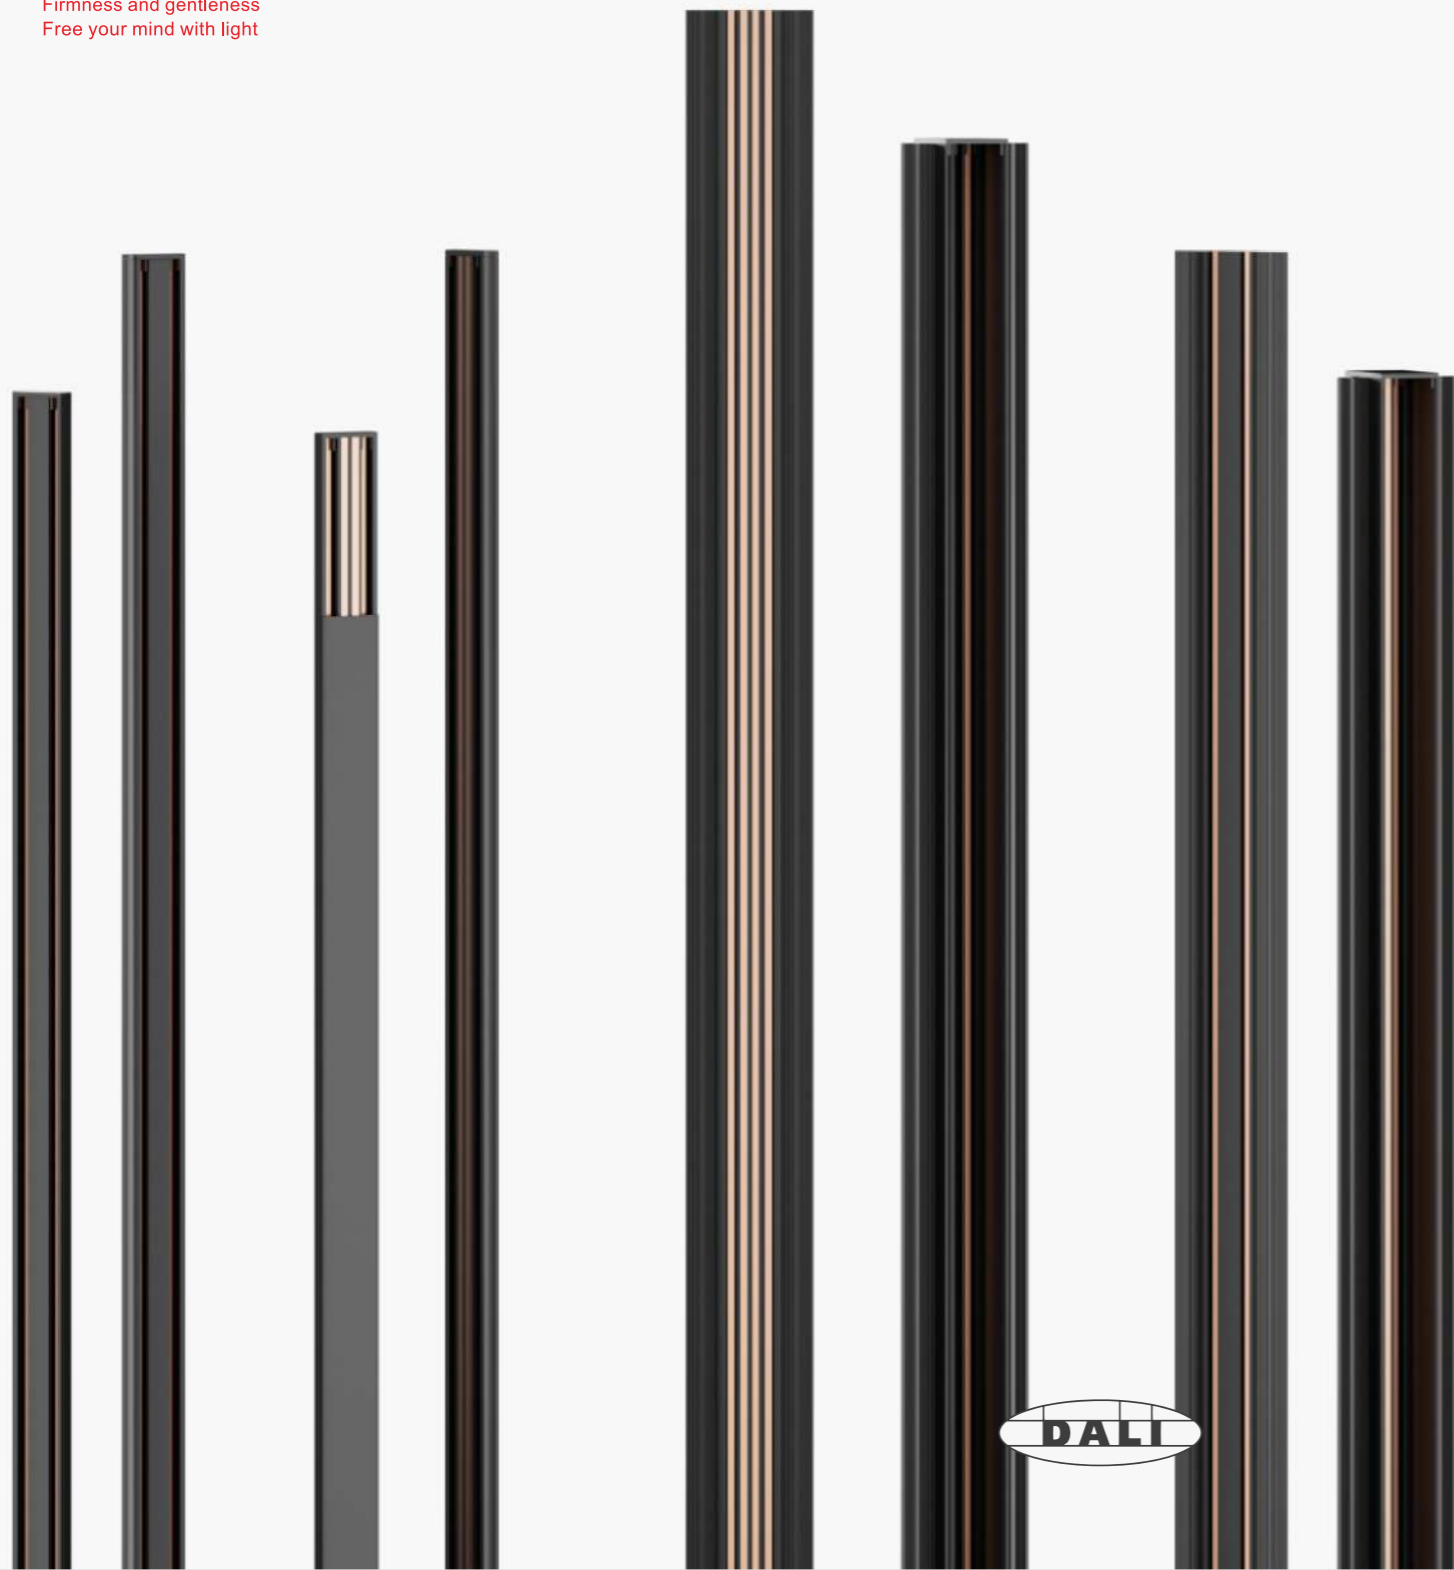

Smart Control Gear



Arris

Flexibility Pendants

Modeler Arris modules provide various combinations for illuminating a space.



R-25T81105



CITIZEN

W B GL



General Informarion


Optics	15° / 24° / 38°
System Power (Watt)	5W / 10W / 18W
Lumen(lm)	69 lm/W, 78 lm/W, 89 lm/W,
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L200.6xΦ30xH127mm R-25T81105 (5W)
L200.6xΦ38xH146mm R-25T81112 (10W)
L200.6xΦ53xH172mm R-25T81120 (18W)

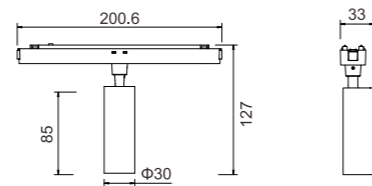

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track



R-25C2-IC R-25C2-L90 R-25C4-CC

Photometric

10W 24° 3000K

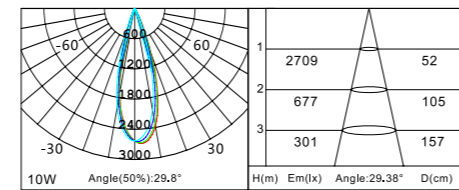

R-25D82205



CITIZEN

W B GL



General Informarion


Optics	30°
System Power (Watt)	4W
Lumen(lm)	83 lm/w
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L200xΦ80xH149mm (12W)

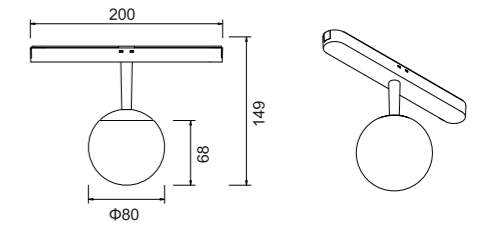

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track



R-25C2-IC R-25C2-L90 R-25C4-CC

Photometric

4W 30° 3000K

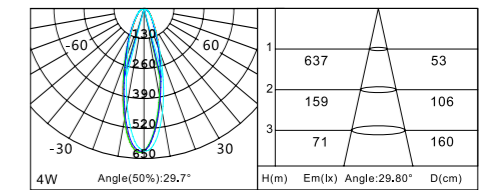

For more product details, please consult the sales team.



R-25A80112



CITIZEN

W B GL



General Informarion


Optics	110°
System Power (Watt)	12W
Lumen(lm)	80 lm/W
Driver Parameters	DC48V

Technical Details


Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L240xW25xH55mm (12W)

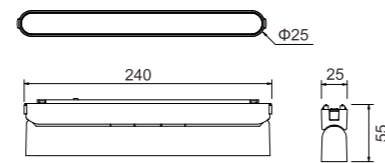

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track



R-25C2-IC R-25C2-L90 R-25C4-CC

Photometric

12W 110° 4000K

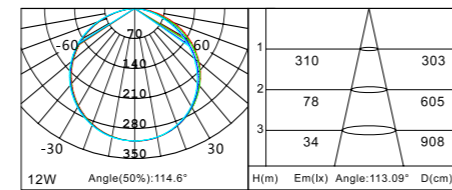

R-25D80012



CITIZEN

W B GL



General Informarion


Optics	110°
System Power (Watt)	12W
Lumen(lm)	80 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L240xW25xH35mm (12W)

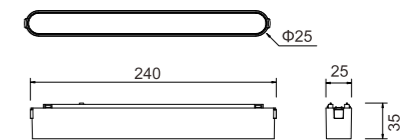

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track



R-25C2-IC R-25C2-L90 R-25C4-CC

Photometric


12W 110° 4000K

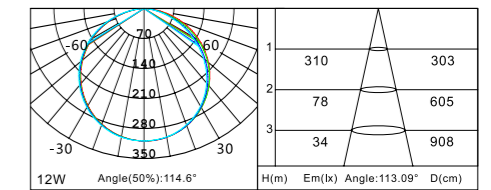

For more product details, please consult the sales team.



R-25A80312



bridgelux LUMINUS CREE

CITIZEN

W B GL

General Informarion



Optics	36°
System Power (Watt)	12W
Lumen(lm)	100 lm/W
Driver Parameters	DC48V

Technical Details


Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Dimensions (mm)

L240xW25xH55mm (12W)

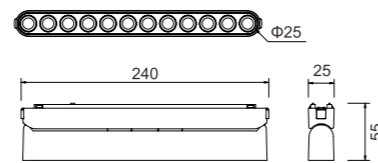

R-25D80612

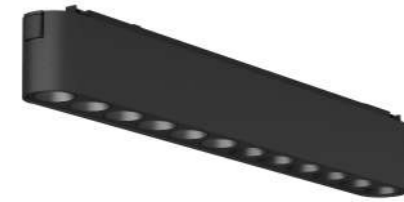

bridgelux LUMINUS CREE

CITIZEN

W B GL

General Informarion


Optics	36°
System Power (Watt)	12W
Lumen(lm)	100 lm/W
Driver Parameters	DC48V

Technical Details


Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI, ON/OFF, 0/1-10V, Wireless, Zigbee, Bluetooth, Tuya, WiFi

Dimensions (mm)

L240xW25xH35mm (12W)

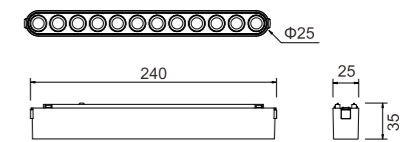

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track



R-25C2-IC R-25C2-L90 R-25C4-CC

Photometric

12W 36° 4000K

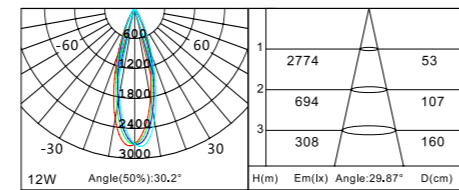

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track



R-25C2-IC R-25C2-L90 R-25C4-CC

Photometric

12W 36° 4000K

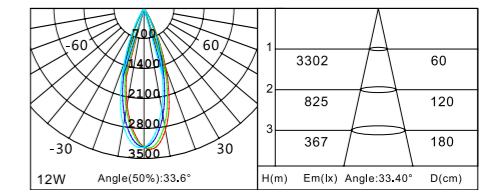

For more product details, please consult the sales team.



R-25P82507

bridgelux LUMINUS CREE

CITIZEN

W B GL




General Informarion

Optics	15° / 24° / 36°
System Power (Watt)	7W
Lumen(lm)	26 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD+COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

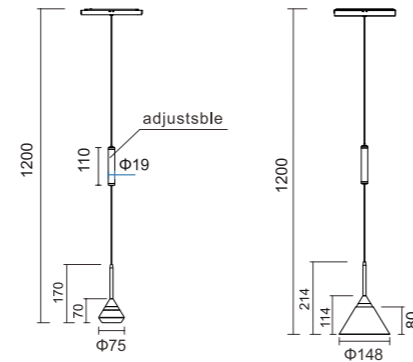

R-25P82205

bridgelux LUMINUS CREE

CITIZEN

W B GL




General Informarion

Optics	30°
System Power (Watt)	4W
Lumen(lm)	83 lm/w
Driver Parameters	DC48V


Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

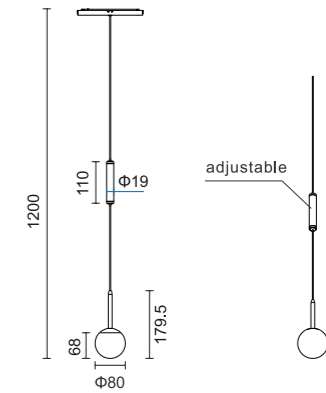

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track




R-25C2-IC R-25C2-L90 R-25C4-CC Optical 可选配件

Photometric

7W 36° 3000K

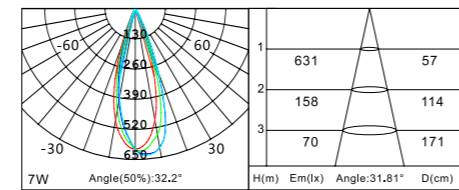

Accessories




R-25R5506-2 二线轨道 2-wire track
R-25R5506-4 四线轨道 4-wire track



R-25C2-IC R-25C2-L90 R-25C4-CC

Photometric

4W 30° 3000K

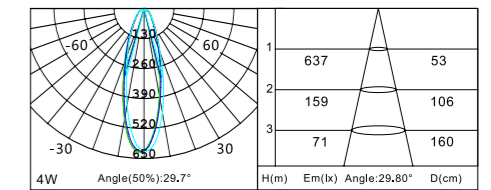

R-25P82107

bridgelux LUMINUS CREE

CITIZEN

W B GL




General Informarion

Optics	15° / 24° / 36°
System Power (Watt)	7W
Lumen(lm)	58 lm/W
Driver Parameters	DC48V


Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

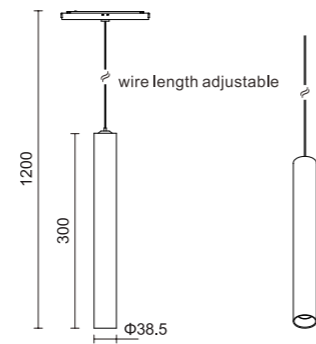

Accessories



R-25R5506-2

二线轨道
2-wire track

R-25R5506-4

四线轨道
4-wire track




R-25C2-IC

R-25C2-L90

R-25C4-CC


Photometric

7W 36° 4000K

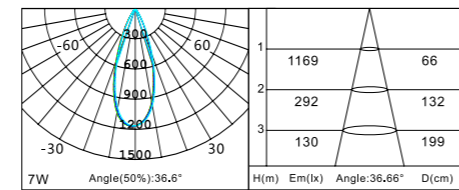



Click & Play

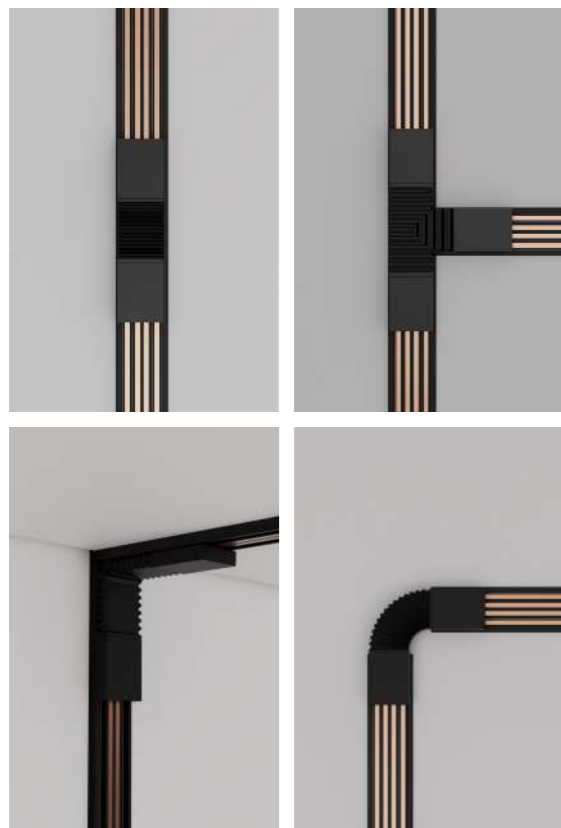

Ways of connection

To meet with various installing situations, this tracking system configured with different ways of connector. It can be placed as needed and it offers more simple method for lighting design.


ACCESSORIES SPECIFICATIONS

2-WIRE TRACKS

unit: mm


R-25R5506-2

2-wire suspension track
Plaster




R-25R5940-2

2-wire suspension track




R-25S2506-2

2-wire surface mounted track



R-25S3006-2

2-wire surface mounted track
(bevel edge)



2-WIRE HARD CONNECTORS

R-25C2-IC

2-wire hard connector:
Applied in the through connection
position.

45x25x6.5mm



R-25C2-L90

2-wire 90°hard connector:
Applied in the plane 90 degree
connection position.

35x35x6.5mm



R-25S2506-EC

End cap:
Applied of both ends of the track.

25x6.5x7mm



R-25R5940-EC

End cap:
Applied of both ends of the track.

40x29x7mm



R-25S3006-EC

End cap:
Applied of both ends of the track.

30x6.5x7mm




4-WIRE TRACKS (Can be changed to 2-wire track.)

unit: mm


R-25R5506-4

4-wire suspension track
Plaster




R-25R5940-4

4-wire suspension track




R-25S2506-4

4-wire surface mounted track



R-25S3006-4

4-wire surface mounted track
(bevel edge)



4-WIRE FLEXIBLE CONNECTOR

R-25C4-CC

4-wire flexible connector(extended soft joint):
Application in the corner co-
nnection position.

127x25x12mm



R-25C4-L90

4-wire flexible connector:
Applied in right angle connection
position.

70x70x12mm



R-25C4-T90

4-wire flexible connector:
Application in T angle connection.

117.5x71.3x6.5mm



R-25C4-SC

Input conductive module:
Transmit DC48V voltage and intelligent
control signal to the rail.



阿拉丁 ALIGHTING
神灯奖 AWARD

The Best Product of The 11th Alighting Award

Softlink

Firmness and gentleness
Free your mind with light




Firmness and gentleness
Free your mind with light

TECH LIGHTING
EXPERIENCE LED

MODELER

Softlink series

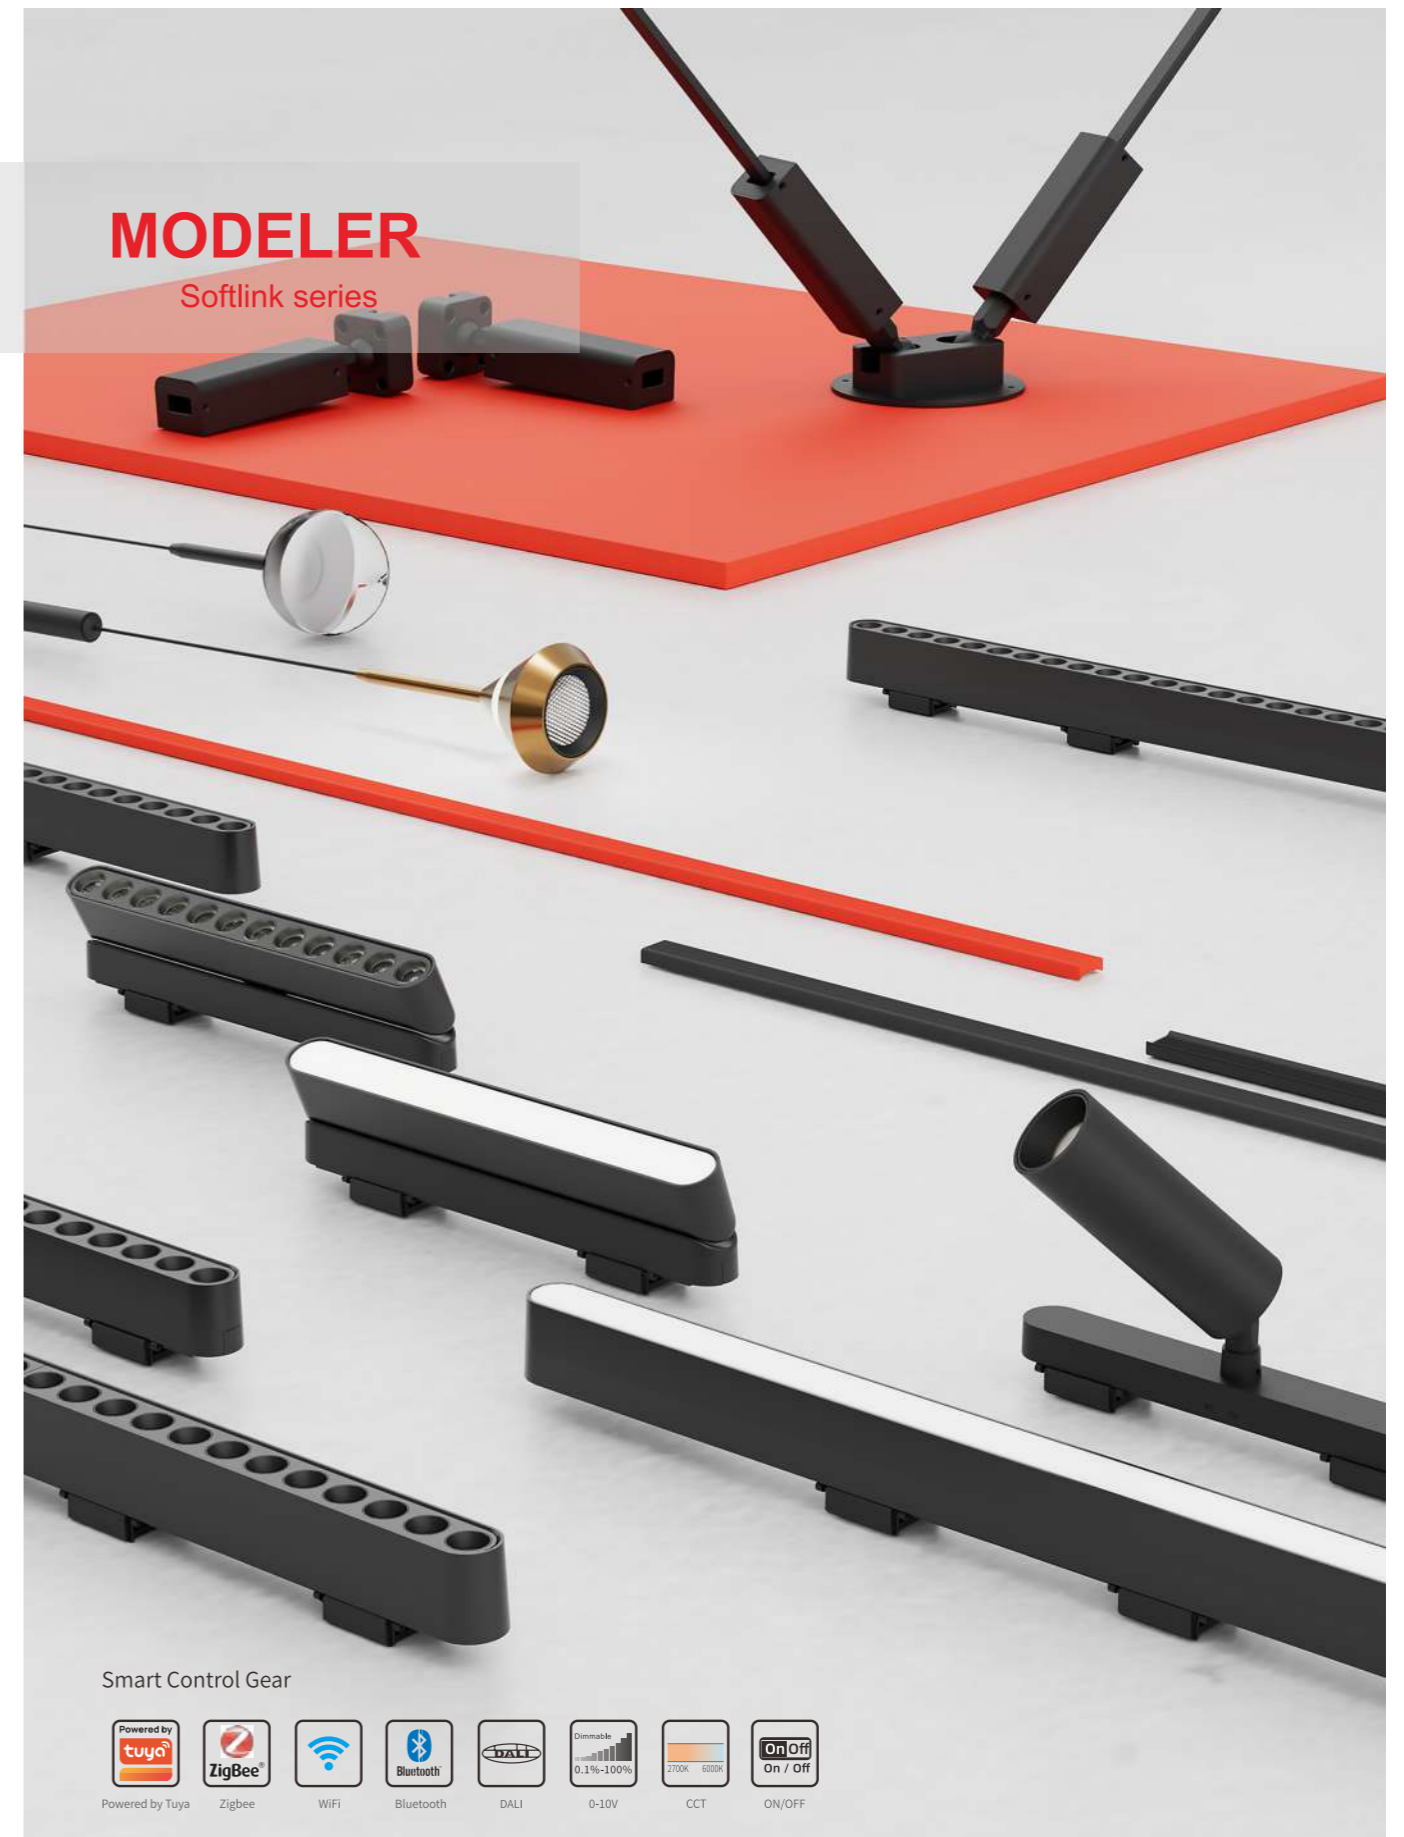


Smart Control Gear



Softlink

Flexibility Pendants

Modeler Softlink modules provide various combinations for illuminating a space.

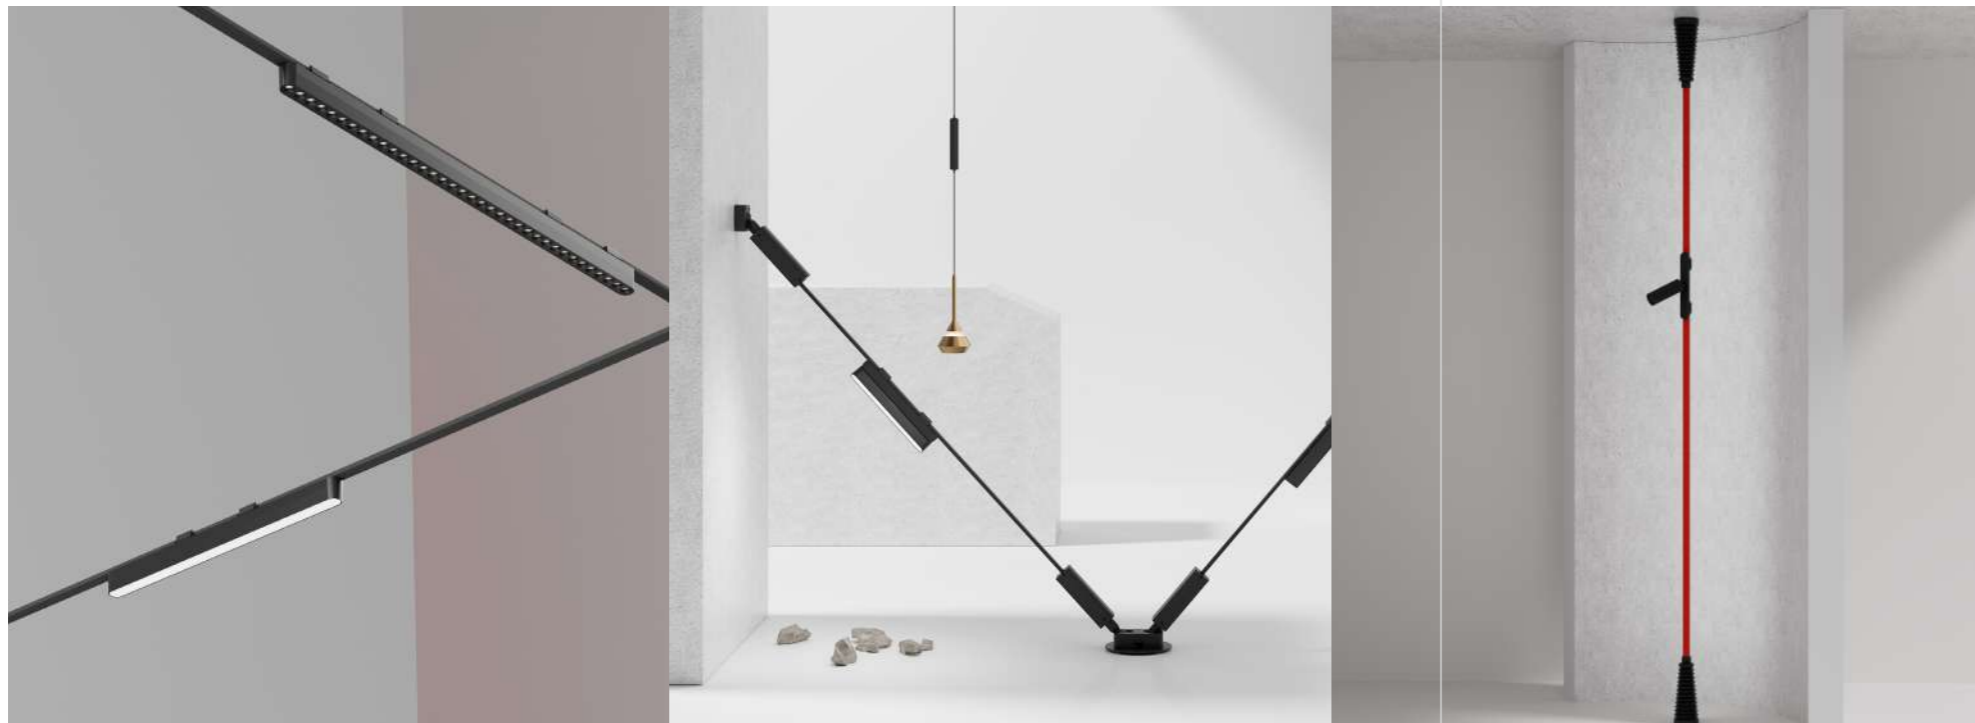

R-21T81105



CITIZEN

W B GL



General Informarion


Optics	15° / 24° / 38°
System Power (Watt)	5W / 10W / 18W
Lumen(lm)	69 lm/W, 78 lm/W, 89 lm/W,
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L198xΦ30xH127mm R-21T81105 (5W)
L198xΦ38xH146mm R-21T81112 (10W)
L198xΦ53xH172mm R-21T81120 (18W)

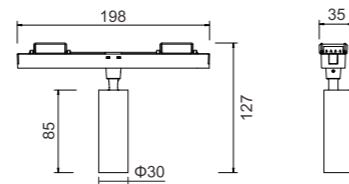

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN



Cord colours:

- Hermes Orange Customizable
- Black



For more product details, please consult the sales team.

R-21D82205



CITIZEN

W B GL




General Informarion

Optics	30°
System Power (Watt)	4W
Lumen(lm)	83 lm/w
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

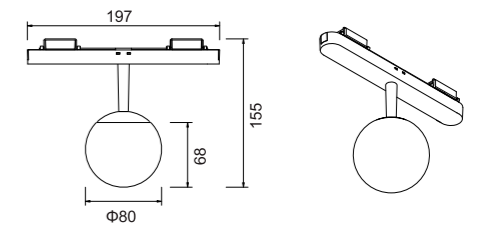

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN



Cord colours:


- Hermes Orange Customizable
- Black



For more product details, please consult the sales team.


Photometric

10W 24° 3000K

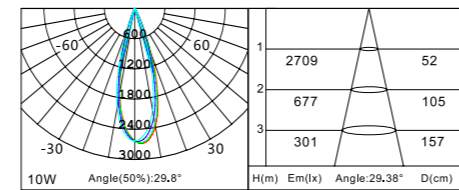

Photometric

4W 30° 3000K

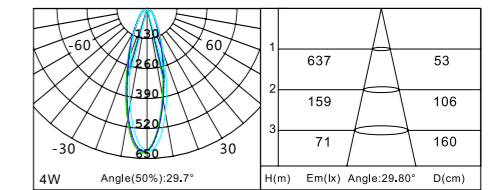

R-21A80112



CITIZEN

W B GL



General Informarion


Optics	110°
System Power (Watt)	12W
Lumen(lm)	80 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L237xW29xH55mm (12W)

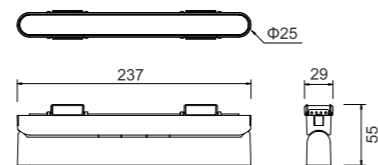

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN



Cord colours:

- Hermes Orange Customizable
- Black



For more product details, please consult the sales team.

R-21D80112



CITIZEN

W B GL



General Informarion


Optics	110°
System Power (Watt)	12W
Lumen(lm)	80 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L237xW29xH41mm R-21D80112 (12W)
 L472xW27.5xH45mm R-21D80124ET (18W)
 L705xW27.5xH45mm R-21D80136ET (22W)
 L937xW27.5xH45mm R-21D80148ET (26W)
 L1170xW27.5xH45mm R-21D80160ET (26W/30W)

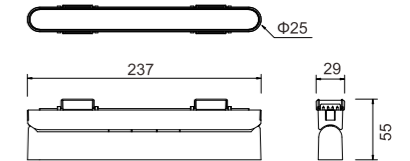

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN




Cord colours:

- Hermes Orange Customizable
- Black



Photometric

12W 110° 4000K

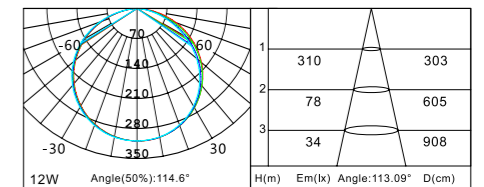

R-21A80312



CITIZEN

W B GL



General Informarion



Optics	36°
System Power (Watt)	12W
Lumen(lm)	100 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L237xW29xH55mm (12W)

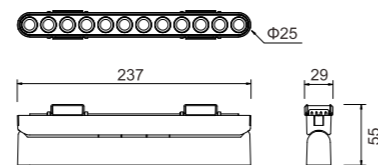

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN



Cord colours:

- Hermes Orange Customizable
- Black



For more product details, please consult the sales team.

R-21D80612



CITIZEN

W B GL



General Informarion


Optics	36°
System Power (Watt)	12W
Lumen(lm)	100 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD-3030
Colour Temperature	2700K/3000K/4000K/5000K/6000K, 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥4
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

L237xW29xH41mm R-21D80612 (12W)
 L472xW27.5xH45mm R-21D80624ET (18W)
 L705xW27.5xH45mm R-21D80636ET (22W)
 L937xW27.5xH45mm R-21D80648ET (26W)
 L1170xW27.5xH45mm R-21D80660ET (26W/30W)

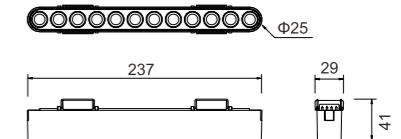

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN




Cord colours:

- Hermes Orange Customizable
- Black



Photometric

12W 36° 4000K

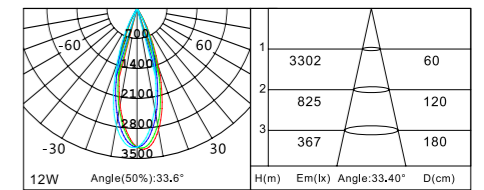

R-21P82507

bridgelux LUMINUS CREE

CITIZEN

W B GL




General Informarion

Optics	15° / 24° / 36°
System Power (Watt)	7W
Lumen(lm)	26 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	SMD+COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

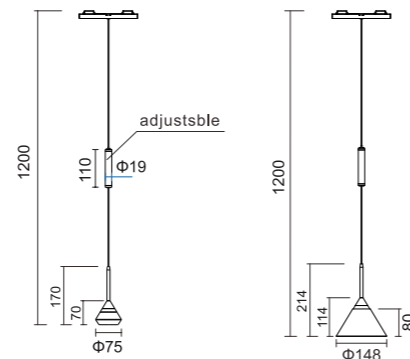

R-21P82205

bridgelux LUMINUS CREE

CITIZEN

W B GL




General Informarion

Optics	30°
System Power (Watt)	4W
Lumen(lm)	83 lm/w
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)

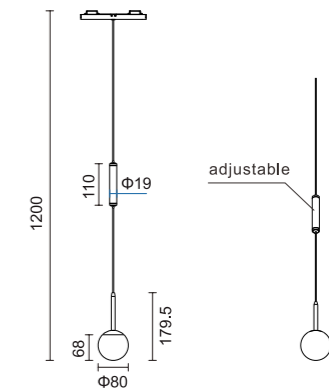

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN Optical
可选配件




Cord colours:

- Hermes Orange Customizable
- Black Customizable

Photometric

7W 36° 3000K

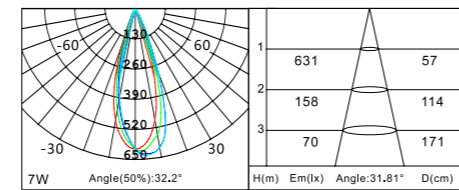

Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN




Cord colours:

- Hermes Orange Customizable
- Black Customizable

Photometric

4W 30° 3000K

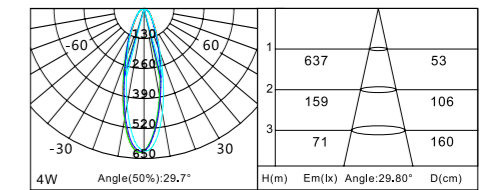

For more product details, please consult the sales team.



R-21P82107



CITIZEN

W B GL




General Informarion

Optics	15° / 24° / 36°
System Power (Watt)	7W
Lumen(lm)	58 lm/W
Driver Parameters	DC48V

Technical Details

Light Source	COB
Colour Temperature	2700K/3000K/4000K/5000K/6000K , 2700K-6500K
CRI	Ra≥90
Colour Bin	SDCM≥3
IP Rating	IP 20
Lifetime	>30,000h
Driver Options	DALI , ON/OFF , 0/1-10V , Wireless , Zigbee , Bluetooth , Tuya , WiFi

Dimensions (mm)



Accessories



R-21S60 R-21S150 R-21P2007PE



R-21P2007 R-21P2007SW-60 R-21C-LA198-SN




Cord colours:

- Hermes Orange Customizable
- Black


Photometric

7W 36° 4000K

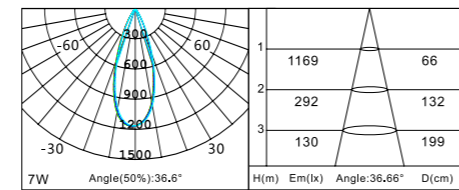


For more product details, please consult the sales team.

Installation

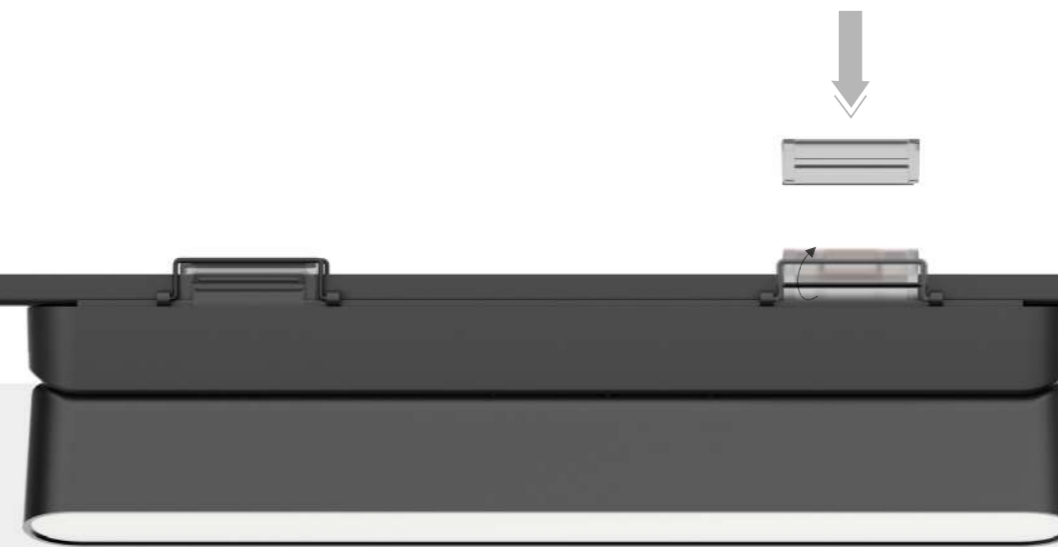


Clip & Play

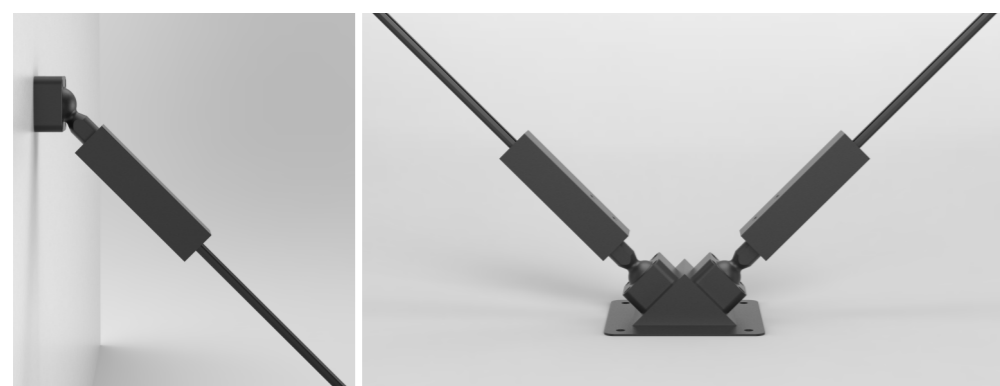

Multi-direction

Flexible installation and connection with adjustable angles. Each line can be cut as needed and light modules easy to replace. It can be fit with LED strip on the back to enhance the atmosphere.

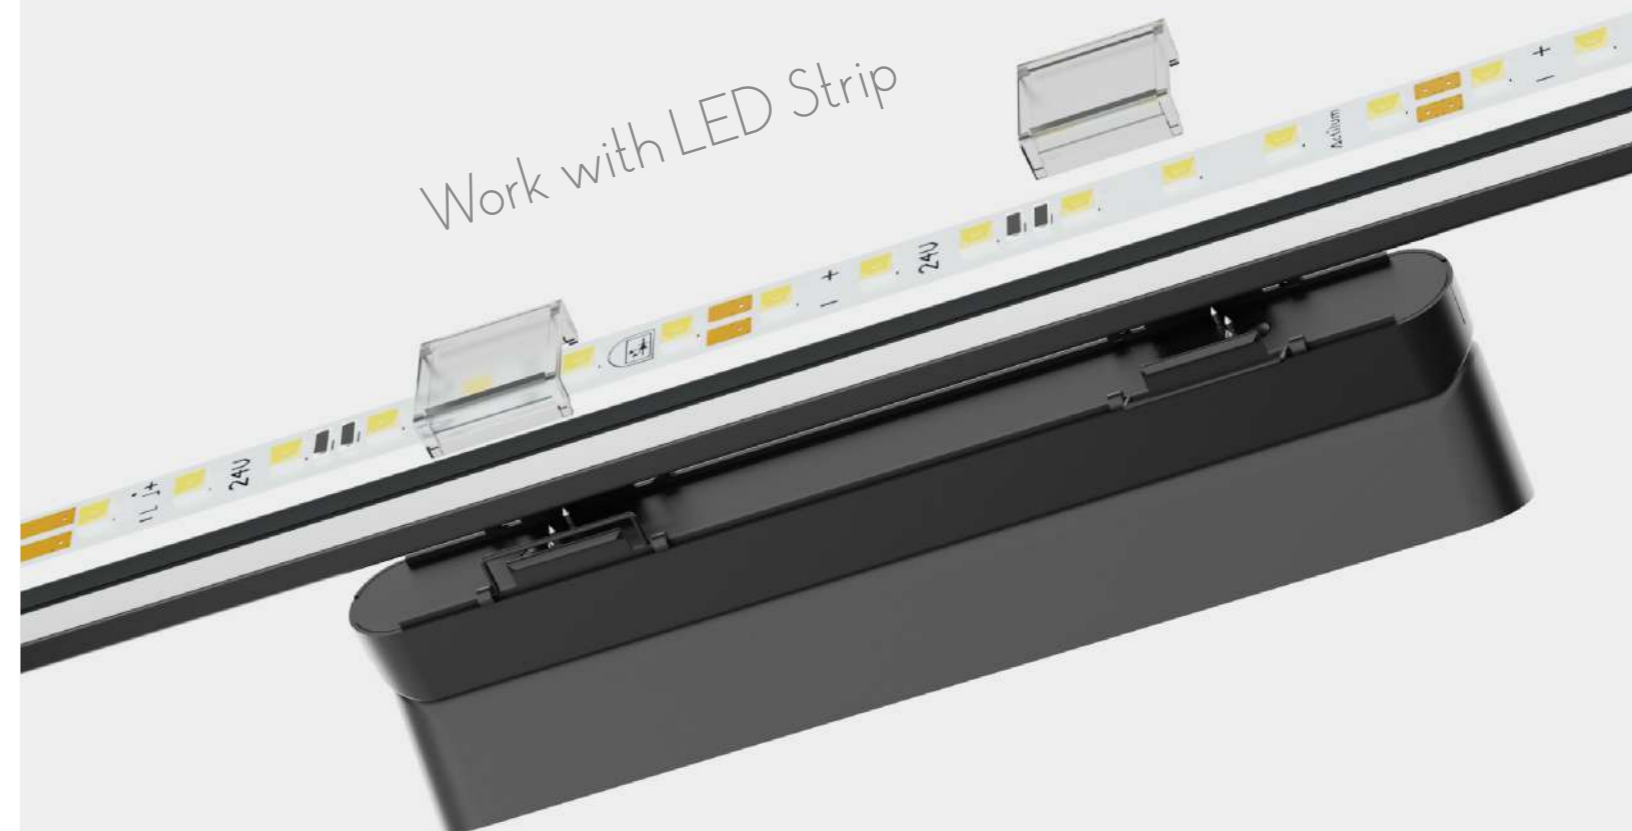



MODELER• SMART SYSTEM

DEBUT SHOW

Firmness and gentleness
Free your mind with light

modeler