




Features


Housing: Die-cast Aluminum ADC12
 Thermal Conductivity: 96 W/m·K
 Led: CREE JK3030
 CRI: Ra>70 (80&90 for option)
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Meanwell HBG
 Driver Efficiency: >92%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 6KV
 Waterproof: IP66
 Impact Test: IK08
 Corrosion Proof: WF2
 Electrical: 100-277V, 50/60Hz
 Operating Temperature: -40~60°C
 TM21: L90B10>50,000H
 Lifetime: 50,000H

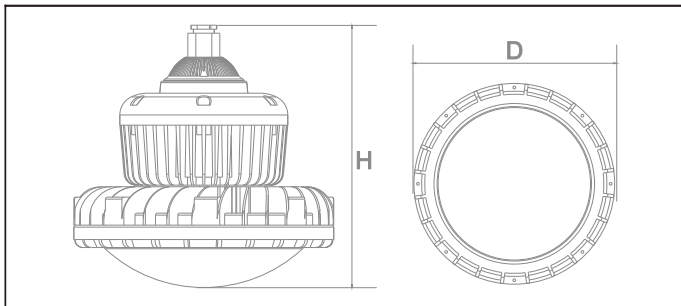

Functions

PWM · DALI · 0/1~10V

Optical options:



130lm/w

5 YEARS WARRANTY

Meanwell Driver

Cree LED

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
EX060SE4F-CM	60W	100~277V	7800LM	>70 (80)	IP66	D325*H315MM
EX080SE4F-CM	80W	100~277V	10400LM	>70 (80)	IP66	D325*H315MM
EX100SE4F-CM	100W	100~277V	13000LM	>70 (80)	IP66	D325*H315MM
EX120SE4F-CM	120W	100~277V	15600LM	>70 (80)	IP66	D325*H315MM
EX150SE4F-CM	150W	100~277V	19500LM	>70 (80)	IP66	D325*H315MM
EX200SE4F-CM	200W	100~277V	26000LM	>70 (80)	IP66	D325*H315MM