




Features


Housing: Plastic With Aluminum Inside
 Thermal Conductivity: 226 W/m·K
 Led: Bridgelux
 CRI: Ra>80
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Boke
 Sensor: Haisen
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 2KV
 Waterproof: IP65
 Impact Test: IK08
 Electrical: 220-240V, 50/60Hz
 Operating Temperature: -20~40°C
 TM21: L80B10>50,000H
 Lifetime: 50,000H

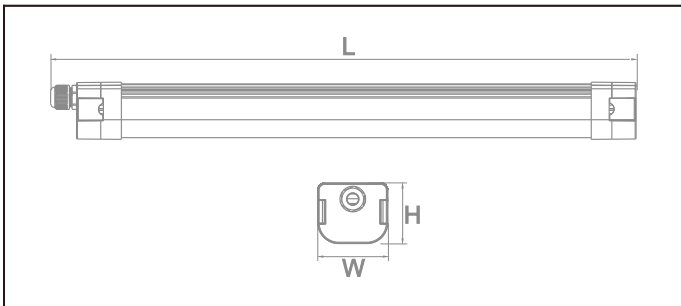

Functions

Micro-wave

Optical options:



Model	Watt	Voltage	Lumen	CRI	IP	Dimension
TP020LE2F-BBM	20W	220~240V	2600LM	>80	IP65	L659*W74*H64MM
TP040LE4F-BBM	40W	220~240V	5200LM	>80	IP65	L1221*W74*H64MM
TP060LE5F-BBM	60W	220~240V	7800LM	>80	IP65	L1502*W74*H64MM