




Features


Housing: Pure Aluminum A6063
 Thermal Conductivity: 226 W/m·K
 Led: CREE JK3030&5050
 CRI: Ra>70 (80/90 for option)
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Inventronic
 Driver Efficiency: >90%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 10KV
 Waterproof: IP66
 Impact Test: IK08
 Electrical: 220-240V, 50/60Hz
 Operating Temperature: -40~50°C
 TM21: L90B10>50,000H
 Lifetime: 50,000H

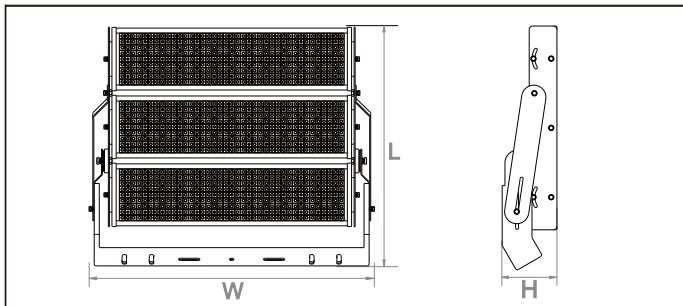

Functions

ZigBee · PWM · DALI · 0/1~10V · DMX

Optical options:

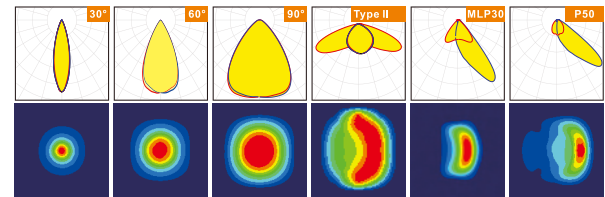

Model	Module	Watt	Voltage	Lumen	CRI	IP	Dimension
HM500PE1I-CI	500W Module x1	500W	100~277V	80000LM	>70	IP66	721*315*158
HM600PE1I-CI	600W Module x1	600W	100~277V	96000LM	>70	IP66	721*315*158
HM1K0PE2I-CI	500W Module x2	1000W	220~240V	160000LM	>70	IP66	810*502*158
HM1K2PE2I-CI	600W Module x2	1200W	220~240V	192000LM	>70	IP66	810*502*158
HM1K5PE3I-CI	500W Module x3	1500W	100~277V	240000LM	>70	IP66	810*704*158
HM1K8PE3I-CI	600W Module x3	1800W	100~277V	288000LM	>70	IP66	810*704*158