



## Features



Housing: Die-cast  
 Thermal Conductivity: 96 W/m·K  
 Led: Philips  
 CRI: Ra>80 ( 90 for option)  
 SDCM: <6  
 Power Factor: >0.95  
 THD: <15  
 Driver: Philips  
 Driver Efficiency: >93%  
 Protection: OTP, OCP, OVP, SCP  
 Surge Protection: 4KV  
 Waterproof: IP65  
 Impact Test: IK08  
 Electrical: 220-240V, 50/60Hz  
 Operating Temperature: -40~60°C  
 TM21: L80B10>50,000H  
 Lifetime: 50,000H



## Functions

ZigBee · PWM · 0/1~10V · Micro-wave

## Optical options:

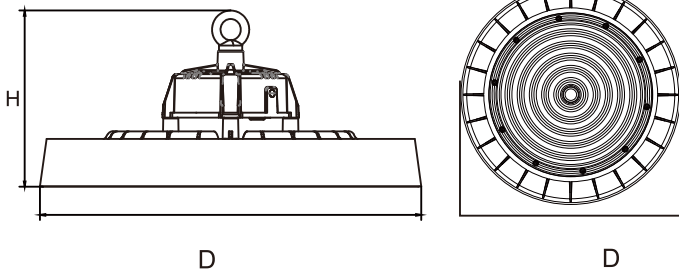

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
HB100WE0I-PP	100W	220~240V	16000LM	>80	IP65	D248*H158MM
HB150WE2I-PP	150W	220~240V	24000LM	>80	IP65	D308*H168MM
HB200WE4I-PP	200W	220~240V	32000LM	>80	IP65	D360*H174MM
HB240WE4I-PP	240W	220~240V	38400LM	>80	IP65	D360*H174MM